



***For a world in motion***



Pastes



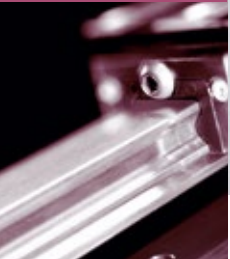
Oils



Greases



Dry Lubricants



Corrosion Protection



Maintenance Products



## ***THE CATALOGUE***

Speciality Lubricants  
Maintenance Products

## 45 YEARS OF TRIBOLOGICAL EXPERTISE – MADE IN GERMANY

### OKS – your professional partner for chemical-technical special products

The OKS brand stands for high-performance products for reducing friction, wear and corrosion. Our products are used in all the areas of production and maintenance technology in which the performance limits of classic lubricants are exceeded.

#### Quality – Made in Germany

The continued success of OKS for 45 years is decisively characterised by the high quality and reliability of our products, as well as the fast implementation of customer requirements through innovative solutions.

The products developed by OKS engineers and chemists are produced under strict quality requirements in Maisach near Munich, Germany, our company's headquarters. Worldwide distribution is carried out just-in-time from Maisach, supported by a modern logistics centre.

The long-standing certifications by the TÜV SÜD Management Service GmbH in the fields of quality (ISO 9001: 2015), environment (ISO 14001: 2015) and work protection (ISO 45001: 2018) are proof of the high OKS quality standard.



[www.tuev-sued.de/ms-zert](http://www.tuev-sued.de/ms-zert)



SUPPLIER OF THE  
YEAR 2013

#### A company of the Freudenberg Group

Since 2003 OKS Spezialschmierstoffe GmbH has been part of the international Freudenberg Group, with headquarters in Weinheim, Germany. We utilize the comprehensive know-how and the innovative power of the Freudenberg Chemical Specialities (FCS) division for the further development of new products and markets to ensure the continued dynamic growth of our company in the future.

#### OKS – Partner to Trade

Our speciality lubricants and chemotechnical maintenance products are sold via the technical and mineral oil trades. The strategy of "sales via trade", the smooth processing of orders and our comprehensive technical service make us one of the preferred partners for demanding customers worldwide. Use our specialist's know-how. Put us to the test.



## CONTENT

- 4\_ Types of lubricants
- 6\_ Technical Terms
- 7\_ OKS Selection Guide
- 8\_ Pastes
- 14\_ Oils
- 26\_ Greases
- 38\_ Dry Lubricants
- 42\_ Corrosion Protection
- 44\_ Maintenance Products and Cleaners
- 50\_ Lubricating Devices
- 51\_ Airspray-System
- 52\_ Lubricant Solutions for Critical Application Conditions
- 53\_ OKS Competence Promise
- 54\_ Sustainability at OKS



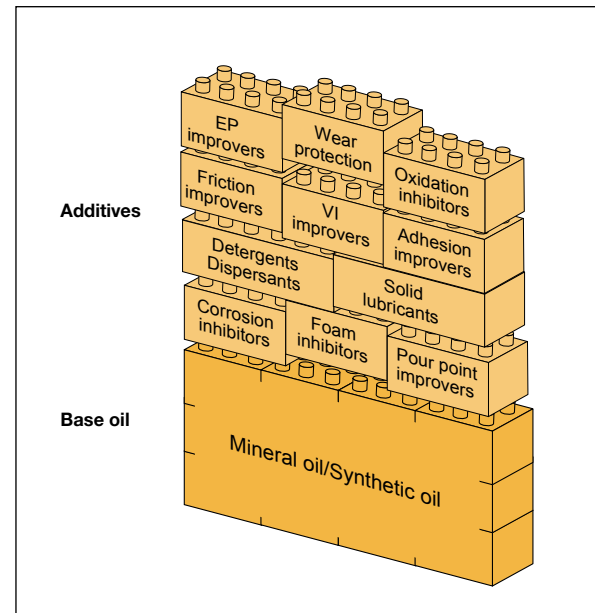
We focus on the development of customer-specific lubricant solutions in close cooperation with our trade partners.

Experts from a wide range of different disciplines work in our laboratories with state-of-the-art systems and test equipment to modify existing or develop new products for special application cases.

## Oils

Oils dissipate heat well from the lubricating point. In addition, they have a notably good creep and wetting behaviour. Therefore oil lubrication is often used at high temperatures or high speeds of rotation.

Typical fields of application are gears, chains, friction bearings, hydraulics and compressors.



### Structure of high-performance oils

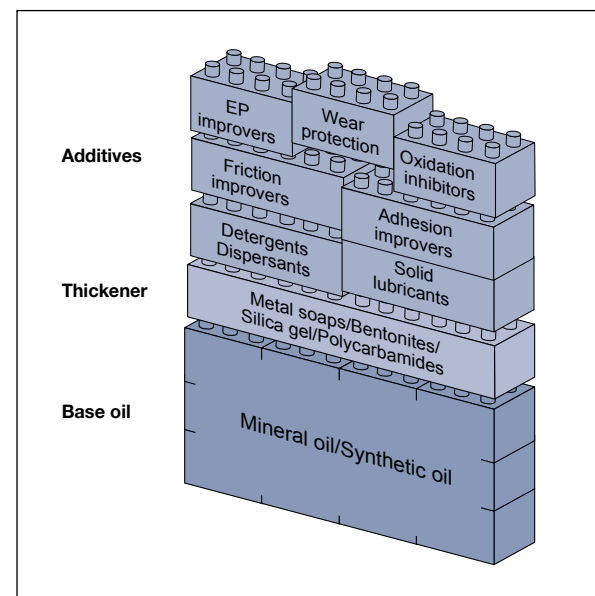
The additives play an important role in the formulation of a high-performance oil in addition to the careful selection of the base oil (type, viscosity) and has considerable influence on the price-performance ratio. Modern lubricating oils are conceived so that when the oil film is breached, the active ingredients form a protective film, so that the surfaces are protected against wear.

### Properties of base oils

The base oil plays a decisive role in the selection of a lubricating oil. Mineral oils, synthetic hydrocarbons (polyalphaolefines = PAO), ester, polyglycols and silicone oils differ notably in their physical properties and chemical behaviour.

## Greases

Greases consist of a base oil that is bound by a thickener (soap). This ensures that the lubricant remains at the lubricating point. There it ensures permanently effective protection against friction and wear and seals the lubricating point against external influences such as moisture and foreign matter. Greases are often used at rolling and friction bearings, spindles, fittings, seals, guides, but also at chains and gears.



### Structure of greases

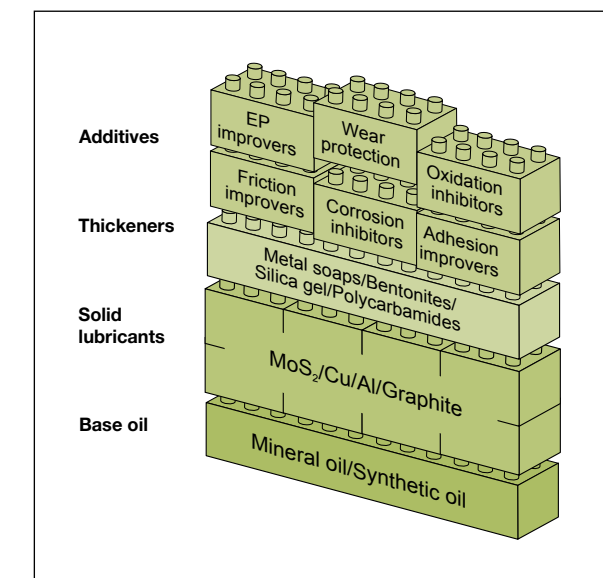
The main difference in the structure of greases compared to oil is the thickener which determines the typical performance features of a grease. Modern lubricating greases are formulated so that their active ingredients form an emergency running lubricating film in case of critical stresses and ensure operational reliability.

### Compatibility of greases

In addition to the compatibility of the base oils, the miscibility of the thickeners has to be taken into account when changing greases. An incompatibility has a negative influence on the performance of the lubricating grease.

## Pastes

The structure of pastes basically corresponds to that of greases. However, the share of solid lubricants is notably higher. This ensures reliable lubricating, separating and corrosion protection effects also when used under extreme temperature and pressure conditions and aggressive media. Pastes are used at screwed connections as well as when pressing in pins and bolts and furthermore at gearwheels.

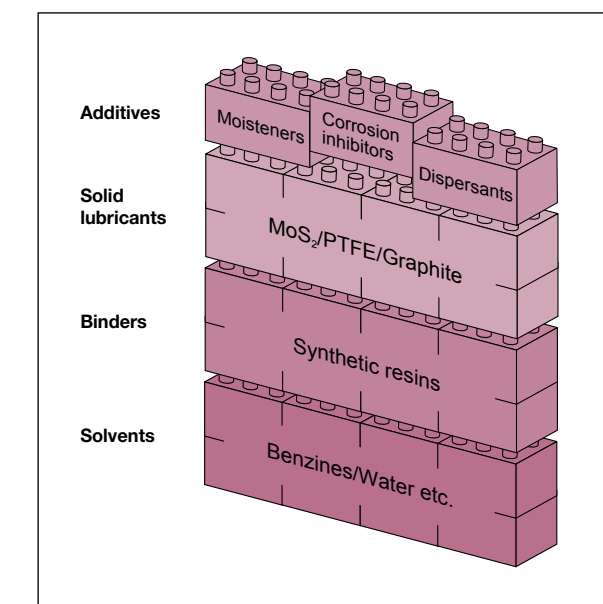


### Structure of pastes

The structure of high-performance pastes is similar to that of greases. The main difference is the high portion of solid component that is typical of both assembly pastes (lubrication effect only) as well as for screw pastes (lubrication and separation effect).

## Dry lubricants

Dry lubricants can be classified into powdery solid lubricants, ceraceous sliding films and solid-content bonded coatings. Bonded coatings are used in many technical fields, e.g. for nuts, screws, bolts, washers, springs, sealing rings, gearwheels, sideways and threaded spindles.



### Structure of bonded coatings

Bonded coatings are solid lubricants (usually MoS<sub>2</sub>, graphite or PTFE) that are embedded in a binder. A solvent that evaporates during the curing or drying time is added for the distribution of the bonded coating.



**DIN 51 502**

The objective of this standard is the uniform marking of standard lubricants via a system of code letters and simple graphic symbols. The marking classifies the lubricant type, the viscosity, the consistency and the operating temperature. However, speciality lubricants can only be described partially by the German standard 51 502.

**DN factor**

The DN factor or rotating speed factor is an empirical guide value that indicates up to which maximum rotating speeds a lubricant can be used in a roller bearing. The DN factor is mainly based on the mean bearing diameter  $(D+d)/2$ , however is highly dependent on the respective bearing type or bearing design.

**Four-ball test**

The four-ball test rig is a testing device for lubricants used at high surface pressures in the mixed friction range. According to DIN 51 350, the four-ball test rig consists of a rotating moving ball which slides on three fixed balls. During the test for the maximum load-bearing capacity of the lubricant, a test force acts on the moving ball, which is increased in steps until the four-ball system is welded together as a result of the friction heat produced.

**Mo<sub>x</sub>-Active**

The Mo<sub>x</sub>-Active (OKS Registered Trademark) contained in lubricants enables a smoothing of the otherwise rough metal surfaces at the lubricating points, and therefore results in a tribologically highly effective surface coating. Run-in times are considerably shortened, and friction and wear are greatly reduced.

**NLGI-Class**

The consistency of lubricating greases is the strength characteristic. According to DIN 2137 it is measured from the penetration depth of a standardised cone. The classification according to NLGI (DIN 51 818) ranges from very soft (Class 000) to very firm (Class 6). Standard lubricating grease usually complies with the NLGI Class 2.

**NSF classification**

Lubricants designed in accordance with the positive list for ingredients of the American Food and Drug Administration (FDA) recognised worldwide are published under an NSF registration number following testing by the National Sanitation Foundation. The classification H1 stands for lubricants which may be used when contact with food cannot be technically excluded. The classification H2 applies to lubri-

cants that may be used when contact with food is technically excluded.

**Press-fit-test**

The Press-fit test provides information on the behaviour and the adhesion of solid lubricants under very high pressure and low sliding speeds. The coefficient of friction  $\mu$  is measured and noted whether stick-slipping occurs.

**Salt spray test**

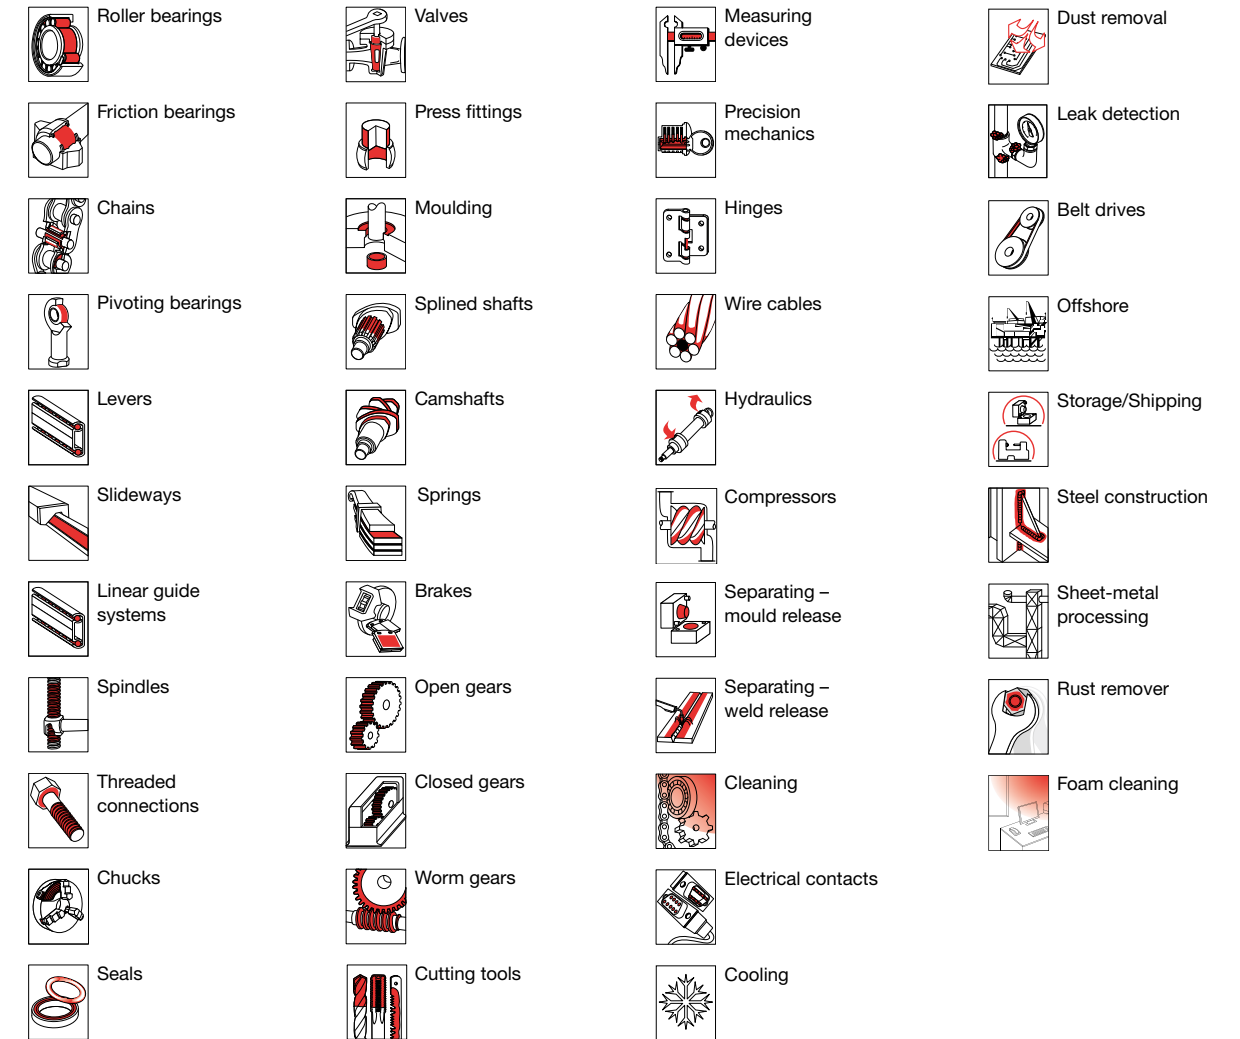
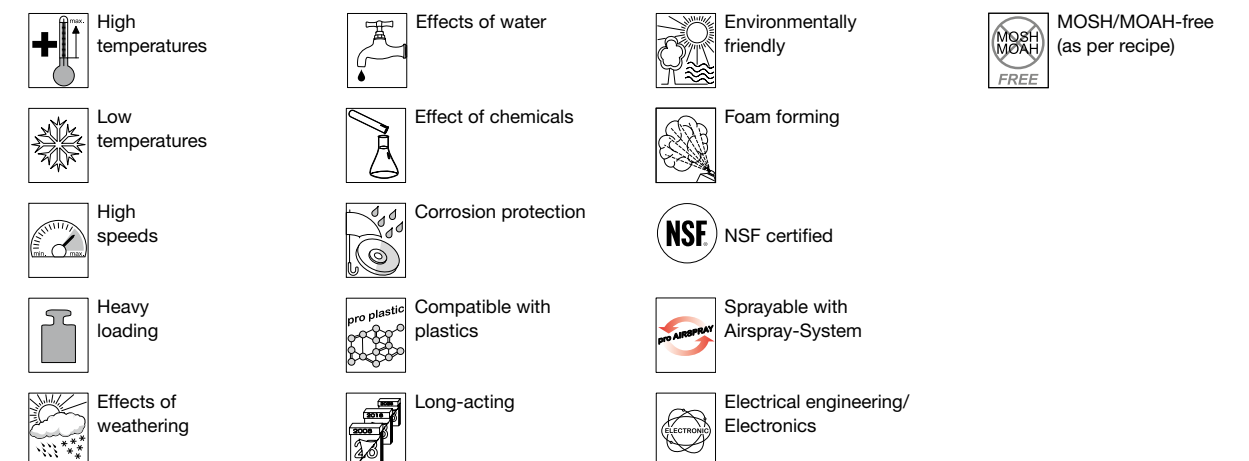
The salt spray test simulates a salty climate to DIN EN ISO 9227 NSS (ex DIN 50 021 SS), whereby coated plates are subjected to a defined salt spray. A check is carried out after how many hours traces of rust arise.

**Thread friction**

The thread friction is determined on a screw test bench. According to DIN EN ISO 16 047 the coefficient of friction  $\mu$  of a screwed connection is obtained when screws and nuts are tightened. Thread dimension, materials and type of the surface have to be specified.

**Viscosity**

Viscosity refers to the property of liquids to produce a resistance to flowing due to their inner friction. The most important influencing factor for the viscosity is the operating temperature. As the temperature increases, the viscosity decreases and vice versa. The assignment in viscosity classes is carried out according to DIN 51 519. The higher the number, the more viscous the liquid.

**Fields of Application****Properties**

Pastes		Pastes					
Product	Designation	Fields of Application	Purpose	Properties / Approvals	Main Components	Technical Data	Packaging
<b>OKS 200</b>	MoS <sub>2</sub> Assembly Paste		<ul style="list-style-type: none"> <li>• Assembly lubrication for press-on processes</li> <li>• Run-in lubrication of highly loaded sliding surfaces</li> <li>• Lubricant for difficult moulding processes</li> <li>• Prevents wearing, stick-slip, seizing, run-in damage or pitting</li> <li>• For universal use</li> </ul>		black white solid lubricants MoS <sub>2</sub> graphite Mo <sub>x</sub> -Active synthetic oil thickener: lithium soap	lower operating temperature: -35 °C upper operating temperature: 450 °C (separation) press-fit test (μ): 0,09, no chatter four-ball test rig welding load: 2,400 N	40 ml Tube 250 g Can 1 kg Can 5 kg Hobbock 25 kg Hobbock
<b>Mo<sub>x</sub>-Active</b>							
<b>OKS 217</b>	High-Temperature Paste, high purity		<ul style="list-style-type: none"> <li>• Assembly lubrication of screw threaded connection made of high-strength steel, at high temperatures in aggressive environment</li> <li>• Optimum ratio of screw tightening torque to achievable pre-tension</li> <li>• No burning together and rusting on</li> <li>• No reaction with metals</li> <li>• For use in the chemical industry</li> </ul>		dark-grey semi-synthetic oil	lower operating temperature: -40 °C upper operating temperature: 1400 °C (separation) press-fit test (μ): 0,11, chatter from 4,000 N on four-ball test rig welding load: 4,400 N thread friction coefficient (μ total): 0.1 (M10: 8.8/10 black-oxide)	250 g Brush tin 1 kg Can 5 kg Hobbock
<b>OKS 220</b> <b>OKS 221*</b>	MoS <sub>2</sub> Rapid Paste		<ul style="list-style-type: none"> <li>• Assembly lubrication for press-on processes</li> <li>• Run-in lubrication of highly loaded sliding surfaces</li> <li>• Lubricant for difficult moulding processes</li> <li>• Effective immediately through high MoS<sub>2</sub> share</li> <li>• Rubbing in the paste not required</li> <li>• High-quality assembly paste</li> </ul>		black MoS <sub>2</sub> other solid lubricants Mo <sub>x</sub> -Active synthetic oil thickener: without	lower operating temperature: -35 °C upper operating temperature: 450 °C (separation) press-fit test (μ): 0,05, no chatter four-ball test rig welding load: 4,200 N	400 ml Cartridge 250 g Can 1 kg Can 5 kg Hobbock 400 ml Spray*
<b>Mo<sub>x</sub>-Active</b>							
<b>OKS 230</b>	MoS <sub>2</sub> High-Temperature Paste		<ul style="list-style-type: none"> <li>• For high-temperature applications up to 450 °C (dry lubrication from approx. 200 °C)</li> <li>• Prevents wearing, stick-slip, seizing, run-in damage, pitting</li> <li>• Carrier oil evaporates residue-free from 200 °C upwards</li> <li>• Bearings of pouring ladles, converters, kiln cars, or similar</li> <li>• Relubrication in operation with OKS 310</li> </ul>		black other solid lubricants MoS <sub>2</sub> polyglycol thickener: lithium hydroxystearate	lower operating temperature: -35 °C upper operating temperature: 180 °C / 450 °C (lubrication / separation) press-fit test (μ): 0,11, no chatter four-ball test rig welding load: 3,200 N thread friction coefficient (μ total): 0.1 (M10: 8.8/10 black-oxide)	250 g Can 1 kg Can 5 kg Hobbock 25 kg Hobbock
<b>OKS 235</b> <b>OKS 2351*</b>	Aluminiumpaste, Anti-Seize-Paste		<ul style="list-style-type: none"> <li>• For assembling screw and bolt threaded connections that are subjected to high temperatures and corrosive influences</li> <li>• Optimum ratio of screw tightening torque to achievable pre-tension</li> <li>• Prevents burning together or rusting on</li> <li>• Prevents seizing</li> <li>• Use as lubricating and separating paste</li> </ul>		silver aluminium powder other solid lubricants mineral oil thickener: organic, inorganic	lower operating temperature: -30 °C upper operating temperature: 110 °C / 1,100 °C (lubrication / separation) thread friction coefficient (μ total): 0.13 (M10: 8.8/10 black-oxide)	250 ml Brush tin 1 kg Can 5 kg Hobbock 25 kg Hobbock 400 ml Spray*
<b>OKS 240</b> <b>OKS 241*</b>	Antiseize Paste (Copper Paste)		<ul style="list-style-type: none"> <li>• For assembling screw threaded connections subjected to high temperatures and corrosive influences</li> <li>• Prevents burning together or rusting on</li> <li>• Optimum ratio of screw tightening torque to achievable pre-tension</li> <li>• Classic anti-seize paste</li> </ul>		copper-brown copper other solid lubricants MoS <sub>2</sub> synthetic oil thickener: inorganic	lower operating temperature: -30 °C upper operating temperature: 1100 °C (separation) press-fit test (μ): 0,12, no chatter four-ball test rig welding load: 2,800 N thread friction coefficient (μ total): 0.09 (M10: 8.8/10 black-oxide)	8 ml Tube 75 ml Tube 250 g Brush tin 1 kg Can 5 kg Hobbock 25 kg Hobbock 400 ml Spray*
<b>OKS 245</b>	Copper Paste with High Corrosion Protection		<ul style="list-style-type: none"> <li>• For screws, bolts and sliding surfaces subjected to high temperatures, water or sea water</li> <li>• Prevents burning together and rusting on</li> <li>• Prevents seizing during assembly</li> <li>• Highly adhesive</li> <li>• Excellent corrosion protection</li> <li>• Suitable for brake systems</li> </ul>		copper-coloured copper powder EP additives AW additives mineral oil thickener: organic, inorganic	lower operating temperature: -30 °C upper operating temperature: 100 °C / 1,100 °C (lubrication / separation) thread friction coefficient (μ total): 0.14 (M10: 8.8/10 black-oxide) four-ball test rig welding load: 3,400 N	150 ml Dispenser 250 ml Brush tin 1 kg Can 5 kg Hobbock 25 kg Hobbock

Pastes

Pastes

Product	Designation	Fields of Application	Purpose	Properties / Approvals	Main Components	Technical Data	Packaging
<b>OKS 250</b> <b>OKS 2501*</b>	White Allround Paste, metal-free		<ul style="list-style-type: none"> <li>For screws, bolts and sliding surfaces subjected to high pressures and temperatures</li> <li>Metal-free</li> <li>Optimum ratio of tightening torque to achievable pre-tension</li> <li>Excellent corrosion protection</li> <li>Also suitable for stainless-steel connections</li> <li>Use as universal high-temperature paste</li> </ul>	 OKS 250: NSF H2 Reg. No. 131379	white white solid lubricants Mo <sub>x</sub> -Active synthetic oil mixture thickener: polycarbamide	lower operating temperature: -40 °C upper operating temperature: 200 °C / 1,400 °C (lubrication / separation) press-fit test (μ): 0,10, no chatter four-ball test rig welding load: 3,600 N thread friction coefficient (μ total): 0.12 / 0.15 (M10: 8.8/10 black-oxide / M10: A2-70/A2-70)	8 ml Tube 80 ml Tube 250 g Brush tin 1 kg Can 5 kg Hobbock 25 kg Hobbock 400 ml Spray*
<b>Mo<sub>x</sub>-Active</b>							
<b>OKS 252</b>	White High-Temperature Paste for Food Processing Technology		<ul style="list-style-type: none"> <li>Lubrication of screws, bolts and sliding surfaces that are subjected to high pressures, high temperatures at low speeds or oscillating movements</li> <li>Prevents burning together and rusting on</li> <li>Metal-free</li> <li>Highly adhesive</li> <li>Universal high-temperature assembly paste</li> </ul>	 OKS 252: NSF H1 Reg. No. 135748	light grey white solid lubricants polyglycol thickener: silicate	lower operating temperature: -30 °C upper operating temperature: 160 °C / 1,200 °C (lubrication / separation) press-fit test (μ): 0,12, no chatter thread friction coefficient (μ total): 0.12 (M10: A2-70/A2-70)	80 ml Tube 200 g Dispenser 250 g Brush tin 1 kg Can
<b>OKS 255</b>	Ceramic Paste		<ul style="list-style-type: none"> <li>Lubrication of highly loaded sliding surfaces of all kinds, especially at low sliding speeds or oscillating movements</li> <li>Surface separation of temperature-stressed threaded connections</li> <li>Also suitable for stainless-steel connections</li> </ul>		white white solid lubricants AW additives EP additives mineral oil thickener: organic, inorganic	lower operating temperature: -30 °C upper operating temperature: 100 °C / 1,400 °C (lubrication / separation) four-ball test rig welding load: 3,400 N thread friction coefficient (μ total): 0.13 (M10: 8.8/10 black-oxide)	150 ml Dispenser 250 ml Brush tin 1 kg Can 5 kg Hobbock 25 kg Hobbock
<b>OKS 260</b>	White Assembly Paste		<ul style="list-style-type: none"> <li>For screws, bolts and sliding surfaces subjected to high pressures at low speeds</li> <li>Optimum ratio of tightening torque to achievable pre-tension</li> <li>Prevents frictional corrosion</li> <li>Metal-free</li> <li>Waterproof</li> </ul>		light-coloured white solid lubricants white oil thickener: lithium soap	lower operating temperature: -25 °C upper operating temperature: 150 °C press-fit test (μ): 0,09, no chatter four-ball test rig welding load: 2,600 N thread friction coefficient (μ total): 0.08 (M10: 8.8/10 black-oxide)	250 g Can 1 kg Can 5 kg Hobbock 25 kg Hobbock
<b>OKS 265</b>	Chuck Jaw Paste		<ul style="list-style-type: none"> <li>For sliding surfaces subjected to high pressures, vibrations and impact loads</li> <li>Optimum coefficient of sliding friction for high elasticity</li> <li>Resistant to water and cooling lubricants</li> <li>Prevents frictional corrosion</li> <li>Especially for chucks on machine tools</li> </ul>		light-coloured white solid lubricants polyalphaolefine thickener: lithium soap	lower operating temperature: -45 °C upper operating temperature: 110 °C four-ball test rig welding load: 4,200 N thread friction coefficient (μ total): 0.1 (M10: 8.8/10 black-oxide)	400 ml Cartridge 1 kg Can 5 kg Hobbock 25 kg Hobbock
<b>OKS 270</b>	White Grease Paste		<ul style="list-style-type: none"> <li>Long-term lubrication of sliding surfaces subjected to high pressures</li> <li>Non-soiling alternative to black lubricants</li> <li>Use as multipurpose grease paste, e.g. on textile, packaging or office machines and household appliances</li> </ul>		light-coloured white solid lubricants PTFE white oil thickener: lithium hydroxystearate	lower operating temperature: -25 °C upper operating temperature: 125 °C (lubrication) press-fit test (μ): 0,14, no chatter four-ball test rig welding load: 5,000 N thread friction coefficient (μ total): 0.09 (M10: 8.8/10 black-oxide)	250 g Can 1 kg Can 5 kg Hobbock 25 kg Hobbock
<b>OKS 277</b>	High-Pressure Lubrication Paste with PTFE		<ul style="list-style-type: none"> <li>Lubrication of heavily loaded press and guide plates</li> <li>Lubrication and sealing of fittings made of metal, plastic and ceramic</li> <li>Long regreasing intervals</li> <li>Good plastic and elastomer compatibility</li> <li>Highly adhesive</li> <li>Use as lubrication paste, e.g. for telescope booms of mobile cranes</li> </ul>		white ester thickener: PTFE	lower operating temperature: -20 °C upper operating temperature: 150 °C four-ball test rig welding load: 2,200 N	1 kg Can 25 kg Hobbock



**Pastes**

**Pastes**

Product	Designation	Fields of Application	Purpose	Properties / Approvals	Main Components	Technical Data	Packaging
<b>OKS 280</b>	<b>White High Temperature Paste</b>		<ul style="list-style-type: none"> <li>Lubricating paste for temperature-stressed sliding surfaces</li> <li>Good separating effect through optimal solid lubricant combinations</li> <li>Prevents carburising of tools and workpieces</li> <li>Extends tool lives</li> <li>Use as separating paste at thermoforming processes</li> </ul>		white white solid lubricants mineral oil thickener: lithium soap	lower operating temperature: -15 °C upper operating temperature: 1,150 °C four-ball test rig welding load: 2,400 N thread friction coefficient ( $\mu$ total): 0.09 (M10: 8.8/10 black-oxide)	1 kg Can 5 kg Hobbock 25 kg Hobbock
<b>OKS 1103</b>	<b>Heat Sink Paste</b>		<ul style="list-style-type: none"> <li>Protection of sensitive electronic components against overheating</li> <li>High thermal conductivity, 20 times better than at air</li> <li>Electrically insulating</li> <li>No drying out, hardening or bleeding</li> <li>For thermal coupling of electronic components such as sensors, probes, diodes, transistors, etc. to cooling plates</li> </ul>		white metal oxides polydimethylsiloxane thickener: inorganic	lower operating temperature: -40 °C upper operating temperature: 180 °C thermal conductivity: approx. 0.7 W/(m·K) (21 °C) dielectric strength: approx. 19 kV/mm thermal capacity (21 °C): approx. 1.03 J/cm³K	40 ml Tube 500 g Can 5 kg Hobbock
	DIN 51 502: MSI3R-40						
<b>OKS 1105</b>	<b>Insulating Paste</b>		<ul style="list-style-type: none"> <li>Sealing lubrication for electrical or electronic equipment</li> <li>Highly adhesive on glass, porcelain and plastics</li> <li>Excellent resistance to chemical and weather-based influences</li> <li>Small change in the dielectric properties across a wide temperature range</li> <li>For protection of insulators and switchgear in a humid atmosphere</li> </ul>		light-coloured polydimethylsiloxane thickener: inorganic	lower operating temperature: -40 °C upper operating temperature: 200 °C specific resistivity: approx. $10^{14}$ 1/Ω cm (25 °C) dielectric constant: 2.75 ( $10^2$ - $10^5$ Hz)	500 g Can 5 kg Hobbock
	analogue to DIN 51 502: MSI23S-40						



## OILS WITH HIGH-PERFORMANCE ADDITIVES FOR RELIABLE LUBRICATION

Oils		Oils					
Product	Designation	Fields of Application	Purpose	Properties / Approvals	Main Components	Technical Data	Packaging
<b>OKS 30</b>	Mo <sub>x</sub> -Active Additive		<ul style="list-style-type: none"> <li>• EP additive for universal use as additive to industrial oils</li> <li>• Improves the run-in lubrication of new and overhauled machines</li> <li>• Smoothing of the surfaces results in lower wear and thermal loading of the lubricant</li> <li>• Makes longer lubricating intervals possible</li> </ul>		greenish Mo <sub>x</sub> -Active ester	density (at 20 °C): 1.03 g/cm <sup>3</sup> viscosity at (40 °C): 70 mm <sup>2</sup> /s	1 l Bottle 5 l Canister
<b>Mo<sub>x</sub>-Active</b>	ISO VG 68						
<b>OKS 300</b>	MoS <sub>2</sub> Mineral Oil Concentrate		<ul style="list-style-type: none"> <li>• Additive on MoS<sub>2</sub> and Mo<sub>x</sub> basis</li> <li>• Reduces friction, temperature and wear</li> <li>• Smoothens the surfaces</li> <li>• Creates emergency-running properties</li> <li>• Passes common filters, does not react to magnetic filters</li> <li>• Additive to gear, engine and machine oils</li> </ul>		black MoS <sub>2</sub> Mo <sub>x</sub> -Active mineral oil	density (at 20 °C): 0.92 g/cm <sup>3</sup> viscosity at (40 °C): approx. 90 mm <sup>2</sup> /s	1 l Bottle 5 l Canister 25 l Canister 200 l Drum
<b>Mo<sub>x</sub>-Active</b>	ISO VG 100						
<b>OKS 310</b>	MoS <sub>2</sub> -High Temperature Lubricating Oil		<ul style="list-style-type: none"> <li>• Lubrication of machine elements up to +450 °C</li> <li>• Residue-free evaporation of the base oil above +200 °C</li> <li>• Dry lubrication from +200 °C to +450 °C</li> <li>• Lubrication in steelworks, foundries, rolling mills, ceramics industry</li> </ul>		black MoS <sub>2</sub> polyglycol	upper operating temperature: 200 °C (liquid lubrication) density (at 20 °C): 1.01 g/cm <sup>3</sup> viscosity at (40 °C): 108 mm <sup>2</sup> /s four-ball test rig welding load: 2,800 N	1 l Bottle 5 l Canister 25 l Canister
	ISO VG 100						
<b>OKS 340</b> <b>OKS 341*</b>	Chain Protector, strongly adhesive		<ul style="list-style-type: none"> <li>• Synthetic lubricant for machine elements subjected to high pressure or corrosive influences</li> <li>• Extremely high creep capacity</li> <li>• Highly adhesive and resistant to throwing off</li> <li>• Excellent wear protection</li> <li>• Chain O-ring neutral</li> <li>• For fast-running chains</li> </ul>		greenish Mo <sub>x</sub> -Active adhesion improver polyisobutylene	lower operating temperature: -30 °C upper operating temperature: 180 °C density (at 20 °C): 0.9 g/cm <sup>3</sup> viscosity at (40 °C): 440 mm <sup>2</sup> /s four-ball test rig welding load: 2,600 N	1 l Bottle 5 l Canister 25 l Canister 200 l Drum 400 ml Spray*
<b>Mo<sub>x</sub>-Active</b>	ISO VG 460 DIN 51 502: CLP X 460						
<b>OKS 350</b>	High-Temperature Chain Oil with MoS <sub>2</sub> , synthetic		<ul style="list-style-type: none"> <li>• Synthetic oil for machine elements at high temperatures</li> <li>• Highly load-bearing capacity due to finest, homogeneous MoS<sub>2</sub> distribution in oil</li> <li>• Emergency running properties through MoS<sub>2</sub> at dry running</li> <li>• Outstanding adhesion and lubrication effect with no tendency to drip or dry out</li> <li>• Silicone-free</li> </ul>		black MoS <sub>2</sub> Mo <sub>x</sub> -Active synthetic oil	lower operating temperature: -30 °C upper operating temperature: 250 °C density (at 20 °C): 0.9 g/cm <sup>3</sup> viscosity at (40 °C): 240 mm <sup>2</sup> /s coefficient of friction SRV (μ): 0.125 (50 °C, 300N, 0.5mm, 50Hz, 120 min)	5 l Canister 25 l Canister 200 l Drum
<b>Mo<sub>x</sub>-Active</b>	ISO VG 220						
<b>OKS 352</b> <b>OKS 3521*</b>	High Temperature Oil, light-coloured, synthetic		<ul style="list-style-type: none"> <li>• Synthetic high-temperature oil</li> <li>• Good wear protective through EP additives</li> <li>• Excellent oxidation protection, therefore resistant to ageing</li> <li>• Low tendency to drip at high temperatures</li> <li>• Minimal evaporation losses</li> <li>• Residue-free evaporation</li> <li>• Good water and steam resistance</li> </ul>		yellowish ester	lower operating temperature: -10 °C upper operating temperature: 250 °C density (at 20 °C): 0.9 g/cm <sup>3</sup> viscosity at (40 °C): 270 mm <sup>2</sup> /s four-ball test rig welding load: 2,400 N	1 l Bottle 5 l Canister 25 l Canister 200 l Drum 400 ml Spray*
	DIN 51 502: CLP E 320						
<b>OKS 353</b>	High-Temperature Oil, light-coloured, synthetic		<ul style="list-style-type: none"> <li>• Synthetic high-temperature oil</li> <li>• Good wear protective through EP additives</li> <li>• Excellent oxidation protection, therefore resistant to ageing</li> <li>• Low tendency to drip at high temperatures</li> <li>• Minimal evaporation losses</li> <li>• Residue-free evaporation</li> <li>• Good cleaning action</li> </ul>		yellow ester	lower operating temperature: -25 °C upper operating temperature: 250 °C density (at 20 °C): 0.96 g/cm <sup>3</sup> viscosity at (40 °C): 100 mm <sup>2</sup> /s four-ball test rig welding load: 2,000 N	1 l Bottle 5 l Canister 25 l Canister
	ISO VG 100 DIN 51 502: CLP E 100						



## OILS WITH HIGH-PERFORMANCE ADDITIVES FOR RELIABLE LUBRICATION

## Oils

## Oils

Product	Designation	Fields of Application	Purpose	Properties / Approvals	Main Components	Technical Data	Packaging
<b>OKS 354</b> <b>OKS 3541*</b>	High-Temperature Adhesive Lubricant, synthetic		<ul style="list-style-type: none"> <li>Lubrication of machine elements at high temperatures or strong influence of water</li> <li>Excellent oxidation protection, therefore resistant to ageing</li> <li>Excellent resistance against water, steam and aggressive media</li> <li>Extremely adhesive</li> </ul>		yellowish Mo <sub>x</sub> -Active ester	lower operating temperature: -10 °C upper operating temperature: 250 °C density (at 20 °C): 0.91 g/cm <sup>3</sup> viscosity at (40 °C): 4,000 mm <sup>2</sup> /s four-ball test rig welding load: 2,200 N	1 l Bottle 5 l Canister 25 l Canister 200 l Drum 400 ml Spray*
<b>Mo<sub>x</sub>-Active</b>	analogue to DIN 51 502: CLP E 4.000						
<b>OKS 370</b> <b>OKS 371*</b>	Universal Oil for Food Processing Technology		<ul style="list-style-type: none"> <li>High-performance oil for precision machine elements</li> <li>Tasteless and odourless</li> <li>Extremely high creep capacity</li> <li>Displaces water</li> <li>Dissolves dirt and rust</li> <li>Washed out of textiles</li> <li>For use in textile and packaging industry</li> </ul>	 OKS 370: NSF H1 Reg. No. 124382 OKS 371: NSF H1 Reg. No. 124384	colourless white oil	lower operating temperature: -10 °C upper operating temperature: 180 °C density (at 20 °C): 0.88 g/cm <sup>3</sup> viscosity at (40 °C): 14 mm <sup>2</sup> /s	5 l Canister 25 l Canister 200 l Drum 400 ml Spray*
	ISO VG 15						
<b>OKS 387</b>	High-Temperature Chain Lubricant for the Food Industry		<ul style="list-style-type: none"> <li>Synthetic lubricant with graphite for strongly loaded lubrication points at extreme temperatures</li> <li>Reduces wear</li> <li>Excellent lubricating and emergency running properties</li> <li>Base oil that evaporates odourlessly and residue-free above +200 °C</li> <li>Dry lubrication up to +600 °C</li> </ul>	 OKS 387: NSF H1 Reg. No. 126583	black graphite polyglycol	upper operating temperature: 150 °C (liquid lubrication) density (at 20 °C): 1.04 g/cm <sup>3</sup> viscosity at (40 °C): 190 mm <sup>2</sup> /s four-ball test rig welding load: 2,800 N	5 l Canister 25 l Canister
	ISO VG 220						
<b>OKS 390</b> <b>OKS 391*</b>	Cutting Oil for all metals		<ul style="list-style-type: none"> <li>For machining work on all metals</li> <li>Permits high cutting speeds</li> <li>Reduces application of force</li> <li>Results in optimum cutting surfaces and extended tool life</li> <li>For universal use in workshops and during assembly work</li> </ul>		yellowish mineral oil	density (at 20 °C): 0.87 g/cm <sup>3</sup> viscosity at (40 °C): 22 mm <sup>2</sup> /s	250 ml Bottle 5 l Canister 25 l Canister 200 l Drum 400 ml Spray*
	ISO VG 22						
<b>OKS 450</b> <b>OKS 451*</b>	Chain and Adhesive Lubricant, transparent		<ul style="list-style-type: none"> <li>For fast-running chains and other machine elements subjected to high pressures or corrosive influences</li> <li>Extremely high creep capacity</li> <li>Highly adhesive, waterproof</li> <li>Resistant to throwing off</li> <li>Excellent wear protection</li> <li>Suitable for lubricating flexible drives</li> </ul>		brown-transparent adhesion improver Mo <sub>x</sub> -Active synthetic oil mixture	lower operating temperature: -30 °C upper operating temperature: 200 °C viscosity at (40 °C): 300 mm <sup>2</sup> /s four-ball test rig welding load: 2,400 N	1 l Bottle 5 l Canister 25 l Canister 200 l Drum 400 ml Spray*
<b>Mo<sub>x</sub>-Active</b>	ISO VG 320 DIN 51 502: CLP X 320						
<b>OKS 600</b> <b>OKS 601*</b>	Multi Oil		<ul style="list-style-type: none"> <li>Low-viscosity multipurpose oil</li> <li>Excellent creep properties</li> <li>Excellent corrosion protection</li> <li>Dismantling rusted-in parts</li> <li>Excellent lubricating properties</li> <li>Displaces moisture</li> <li>For cleaning and care of metal surfaces</li> <li>Protects electrical contacts</li> </ul>		brownish transparent mineral oil	lower operating temperature: -30 °C upper operating temperature: 60 °C density (at 20 °C): 0.81 g/cm <sup>3</sup> viscosity at (40 °C): approx. 3 mm <sup>2</sup> /s salt spray test: > 50 h coefficient of friction SRV (μ): 0.09 (ball, disk)	5 l Canister 25 l Canister 200 l Drum 400 ml Spray*
	analogue to DIN 51 502: CL 3						
<b>OKS 641</b>	Maintenance Oil, Spray		<ul style="list-style-type: none"> <li>For dismantling, lubrication and care of machine elements and metal surfaces</li> <li>Good cleaning action</li> <li>Temporary protection against corrosion</li> <li>Displaces moisture</li> <li>For use in industry and workshop field</li> </ul>		brown mineral oil	lower operating temperature: -30 °C upper operating temperature: 60 °C / 150 °C (with solvent / after evaporation of the solvent) density (at 20 °C): 0.82 g/cm <sup>3</sup> viscosity at (40 °C): 3 mm <sup>2</sup> /s (with solvent) coefficient of friction SRV (μ): 0.11 (ball, disk) salt spray test: > 100 h	400 ml Spray
<b>OKS 670</b> <b>OKS 671*</b>	High-Performance Lube Oil with white Solid Lubricants		<ul style="list-style-type: none"> <li>Long-term lubrication of machine elements subjected to high pressures, dust or moisture</li> <li>Excellent corrosion protection</li> <li>Good creep properties</li> <li>Lubrication wherever good penetration capacity is the only possibility for relubrication, e.g. at joints, hinges, levers and guides</li> </ul>		beige white solid lubricants mineral oil	lower operating temperature: -30 °C upper operating temperature: 60 °C / 150 °C (with solvent / after evaporation of the solvent) density (at 20 °C): 0.82 g/cm <sup>3</sup> viscosity at (40 °C): 18 mm <sup>2</sup> /s (with solvent) coefficient of friction SRV (μ): 0.08 (ball, disk) salt spray test: > 150 h	5 l Canister 25 l Canister 200 l Drum 400 ml Spray*
	analogue to DIN 51 502: CLF 15						

## OILS WITH HIGH-PERFORMANCE ADDITIVES FOR RELIABLE LUBRICATION

## Oils

## Oils

Product	Designation	Fields of Application	Purpose	Properties / Approvals	Main Components	Technical Data	Packaging
<b>OKS 700</b> <b>OKS 701*</b>	Synthetic Oil  analogue to DIN 51 502: CL X 15		<ul style="list-style-type: none"> <li>• For lubrication and care of high-precision machine elements</li> <li>• Resin and acid-free</li> <li>• Good creep behaviour</li> <li>• Excellent wetting behaviour</li> <li>• Compatible with plastics</li> <li>• For use on measuring instruments in precision mechanics or optics</li> </ul>		light brown polyisobutylene	lower operating temperature: -50 °C upper operating temperature: 100 °C density (at 20 °C): 0.84 g/cm <sup>3</sup> viscosity at (40 °C): 17.5 mm <sup>2</sup> /s	5 l Canister 25 l Canister 100 ml Spray 400 ml Spray*
<b>OKS 1010/1</b>	Silicone Oil, 100 cSt		<ul style="list-style-type: none"> <li>• Lubricant and parting agents for plastics and elastomers</li> <li>• Also as damping oil</li> <li>• Neutral with respect to plastics, elastomers or paints</li> <li>• Broad temperature application range</li> <li>• Excellent surface wetting</li> <li>• Resin and acid-free</li> <li>• Viscosity of 100 cSt</li> </ul>		transparent polydimethylsiloxane	lower operating temperature: -50 °C upper operating temperature: 200 °C density (at 20 °C): 0.96 - 0.97 g/cm <sup>3</sup> viscosity at (25 °C): 100 mm <sup>2</sup> /s	1 l Bottle 5 l Canister 25 l Canister 200 l Drum
<b>OKS 1010/2</b>	Silicone Oil, 1000 cSt		<ul style="list-style-type: none"> <li>• Lubricant and parting agents for plastics and elastomers</li> <li>• Also as damping oil</li> <li>• Neutral with respect to plastics, elastomers or paints</li> <li>• Broad temperature application range</li> <li>• Excellent surface wetting</li> <li>• Resin and acid-free</li> <li>• Viscosity of 1,000 cSt</li> </ul>	  OKS 1010/2: NSF H1 Reg. No. 135921	transparent polydimethylsiloxane	lower operating temperature: -50 °C upper operating temperature: 200 °C density (at 20 °C): 0.96 - 0.97 g/cm <sup>3</sup> viscosity at (25 °C): 1,000 mm <sup>2</sup> /s	1 l Bottle 5 l Canister 25 l Canister
<b>OKS 1020/2</b>	Silicone Oil, 2000 cSt		<ul style="list-style-type: none"> <li>• Lubricant and parting agents for plastics and elastomers</li> <li>• Also as damping oil</li> <li>• Neutral with respect to plastics, elastomers or paints</li> <li>• Broad temperature application range</li> <li>• Excellent surface wetting</li> <li>• Resin and acid-free</li> <li>• Viscosity of 2,000 cSt</li> </ul>		transparent polydimethylsiloxane	lower operating temperature: -50 °C upper operating temperature: 200 °C density (at 20 °C): 0.96 - 0.97 g/cm <sup>3</sup> viscosity at (25 °C): 2,000 mm <sup>2</sup> /s	5 l Canister 25 l Canister 200 l Drum
<b>OKS 1035/1</b>	Silicone Oil, 350 cSt		<ul style="list-style-type: none"> <li>• Lubricant and parting agents for plastics and elastomers</li> <li>• Also as damping oil</li> <li>• Neutral with respect to plastics, elastomers or paints</li> <li>• Broad temperature application range</li> <li>• Excellent surface wetting</li> <li>• Resin and acid-free</li> <li>• Viscosity of 350 cSt</li> </ul>	  OKS 1035/1: NSF H1 Reg. No. 154506	transparent polydimethylsiloxane	lower operating temperature: -50 °C upper operating temperature: 200 °C density (at 20 °C): 0.96 - 0.97 g/cm <sup>3</sup> viscosity at (25 °C): 350 mm <sup>2</sup> /s	1 l Bottle 5 l Canister 25 l Canister 200 l Drum
<b>OKS 1050/0</b>	Silicone Oil, 50 cSt		<ul style="list-style-type: none"> <li>• Lubricant and parting agents for plastics and elastomers</li> <li>• Also as damping oil</li> <li>• Neutral with respect to plastics, elastomers or paints</li> <li>• Broad temperature application range</li> <li>• Excellent surface wetting</li> <li>• Resin and acid-free</li> <li>• Viscosity of 50 cSt</li> </ul>		transparent polydimethylsiloxane	lower operating temperature: -50 °C upper operating temperature: 200 °C density (at 20 °C): 0.96 - 0.97 g/cm <sup>3</sup> viscosity at (25 °C): 50 mm <sup>2</sup> /s	1 l Bottle 5 l Canister 25 l Canister

## OILS WITH HIGH-PERFORMANCE ADDITIVES FOR RELIABLE LUBRICATION

## Oils

## Oils



Product	Designation	Fields of Application	Purpose	Properties / Approvals	Main Components	Technical Data	Packaging
<b>OKS 1050/1</b>	Silicone Oil, 500 cSt		<ul style="list-style-type: none"> <li>Lubricant and parting agents for plastics and elastomers</li> <li>Also as damping oil</li> <li>Neutral with respect to plastics, elastomers or paints</li> <li>Broad temperature application range</li> <li>Excellent surface wetting</li> <li>Resin and acid-free</li> <li>Viscosity of 500 cSt</li> </ul>		transparent polydimethylsiloxane	lower operating temperature: -50 °C upper operating temperature: 200 °C density (at 20 °C): 0.96 - 0.97 g/cm <sup>3</sup> viscosity at (25 °C): 500 mm <sup>2</sup> /s	5 l Canister
<b>OKS 3570</b> <b>OKS 3571*</b>	High-Temperature Chain Oil for Food Processing Technology  ISO VG 320 analogue to DIN 51 502: CLP E 320		<ul style="list-style-type: none"> <li>Lubrication of chains, hinges, joints, clamping and drying frames or slideways at high temperatures up to 250 °C</li> <li>Good adhesion on metal surfaces</li> <li>Excellent water resistance</li> <li>Excellent oxidation properties</li> <li>For use in conveying systems, painting, stoving and drying systems of the packaging and food processing industry</li> </ul>		yellowish-red synthetic oil	lower operating temperature: -10 °C upper operating temperature: 250 °C density (at 20 °C): 0.87 g/cm <sup>3</sup> viscosity at (40 °C): 300 mm <sup>2</sup> /s	5 l Canister 25 l Canister 200 l Drum 400 ml Spray*
<b>OKS 3600</b> <b>OKS 3601*</b>	Adhesive Oil and High-Performance Corrosion Protection for Food Processing Technology		<ul style="list-style-type: none"> <li>Excellent corrosion protection of bare machine parts, also for food processing technology</li> <li>Storage and lubrication under corrosive conditions</li> <li>Good creep properties</li> <li>Contains non-ferrous metal deactivator</li> <li>Shipping protection of metal surfaces, packed and unpacked machines under extreme climatic conditions, industrial atmosphere or at outdoor weathering under roof</li> </ul>		yellow-brown polyalphaolefine	lower operating temperature: -40 °C upper operating temperature: 80 °C density (at 20 °C): 0.81 g/cm <sup>3</sup> viscosity at (100 °C): > 21.5 mm <sup>2</sup> /s salt spray test: > 100 h / > 300 h (brush application / spray application (max.))	5 l Canister 25 l Canister 400 ml Spray*
<b>OKS 3710</b> <b>OKS 3711*</b>	Low-Temperature Oil for Food Processing Technology  ISO VG 7 DIN 51 502: CL HC 7		<ul style="list-style-type: none"> <li>Fully synthetic oil for permanently low temperatures</li> <li>Excellent low-temperature behaviour</li> <li>Optimal additives against oxidation and ageing</li> <li>Long economic operating times</li> <li>For use in cold storage houses, shock freezers, etc.</li> </ul>		colourless polyalphaolefine	lower operating temperature: -60 °C upper operating temperature: 135 °C density (at 20 °C): 0.8 g/cm <sup>3</sup> viscosity at (40 °C): 7.35 mm <sup>2</sup> /s	5 l Canister 25 l Canister 200 l Drum 400 ml Spray*
<b>OKS 3720</b>	Gear Oil for Food Processing Technology  ISO VG 220 DIN 51 502: CLP HC 220		<ul style="list-style-type: none"> <li>Fully synthetic</li> <li>Also for the lubrication of rolling, friction bearings, chains and other lubricating points</li> <li>Long operating times due to high temperature and oxidation stability</li> <li>Good wear protection</li> <li>Resistant to steam, alkali and acid disinfectants and cleaning agents</li> </ul>		colourless-yellow synthetic oil mixture	lower operating temperature: -30 °C upper operating temperature: 120 °C density (at 20 °C): 0.86 g/cm <sup>3</sup> viscosity at (40 °C): 220 mm <sup>2</sup> /s FZG wear protection test: power level > 12 (A/8,3/90)	5 l Canister 25 l Canister 200 l Drum
<b>OKS 3725</b>	Gear Oil for Food Processing Technology  ISO VG 320 DIN 51 502: CLP HC 320		<ul style="list-style-type: none"> <li>Fully synthetic</li> <li>Also for the lubrication of rolling, friction bearings, chains and other lubricating points</li> <li>Long operating times due to high temperature and oxidation stability</li> <li>Good wear protection</li> <li>Resistant to steam, alkali and acid disinfectants and cleaning agents</li> </ul>		colourless-yellow synthetic oil mixture	lower operating temperature: -30 °C upper operating temperature: 120 °C viscosity at (40 °C): 320 mm <sup>2</sup> /s FZG wear protection test: power level > 12 (A/8,3/90)	5 l Canister 25 l Canister
<b>OKS 3730</b>	Gear Oil for Food Processing Technology  ISO VG 460 DIN 51 502: CLP HC 460		<ul style="list-style-type: none"> <li>Fully synthetic</li> <li>Also for the lubrication of rolling, friction bearings, chains and other lubricating points</li> <li>Long operating times due to high temperature and oxidation stability</li> <li>Good wear protection</li> <li>Resistant to steam, alkali and acid disinfectants and cleaning agents</li> </ul>		colourless-light yellow synthetic oil mixture	lower operating temperature: -30 °C upper operating temperature: 120 °C density (at 20 °C): 0.86 g/cm <sup>3</sup> viscosity at (40 °C): 460 mm <sup>2</sup> /s FZG wear protection test: power level > 12 (A/8,3/90)	5 l Canister 25 l Canister 200 l Drum



Oils		Oils					
Product	Designation	Fields of Application	Purpose	Properties / Approvals	Main Components	Technical Data	Packaging
<b>OKS 3740</b>	<b>Gear Oil for Food Processing Technology</b>  ISO VG 680 DIN 51 502: CLP HC 680		<ul style="list-style-type: none"> <li>Fully synthetic</li> <li>Also for the lubrication of rolling, friction bearings, chains and other lubricating points</li> <li>Long operating times due to high temperature and oxidation stability</li> <li>Good wear protection</li> <li>Resistant to steam, alkali and acid disinfectants and cleaning agents</li> </ul>	  OKS 3740: NSF H1 Reg. No. 135754	colourless synthetic oil mixture	lower operating temperature: -25 °C upper operating temperature: 120 °C density (at 20 °C): 0.86 g/cm <sup>3</sup> viscosity at (40 °C): 680 mm <sup>2</sup> /s FZG wear protection test: power level > 12 (A/8,3/90)	5 l Canister 25 l Canister
<b>OKS 3750</b> <b>OKS 3751*</b>	<b>Adhesive Lubricant with PTFE</b>  ISO VG 100 DIN 51 502: CLPF HC 100		<ul style="list-style-type: none"> <li>Lubricating oil with PTFE</li> <li>Long operating times due to high temperature and oxidation stability</li> <li>Excellent wear protection, adheres well</li> <li>High pressure absorption capacity</li> <li>Resistant to steam, alkali and acid disinfectants and cleaning agents</li> </ul>	  OKS 3750: NSF H1 Reg. No. 124383 OKS 3751: NSF H1 Reg. No. 124801	whitish PTFE polyalphaolefine	lower operating temperature: -35 °C upper operating temperature: 180 °C density (at 20 °C): 0.85 g/cm <sup>3</sup> viscosity at (40 °C): 100 mm <sup>2</sup> /s four-ball test rig welding load: 3,000 N	5 l Canister 400 ml Spray*
<b>OKS 3760</b>	<b>Multipurpose Oil for Food Processing Technology</b>  ISO VG 100 analogue to DIN 51 502: HLP HC 100, VDL HC 100		<ul style="list-style-type: none"> <li>Fully synthetic multipurpose oil</li> <li>Also suitable as compressor- or hydraulic oil</li> <li>Long operating times due to high temperature and oxidation stability</li> <li>Good wear protection</li> <li>Resistant to steam, alkali and acid disinfectants and cleaning agents</li> <li>Tasteless and odourless</li> </ul>	  OKS 3760: NSF H1 Reg. No. 129964	colourless polyalphaolefine	lower operating temperature: -35 °C upper operating temperature: 135 °C density (at 20 °C): 0.84 g/cm <sup>3</sup> viscosity at (40 °C): 100 mm <sup>2</sup> /s	1 l Bottle 5 l Canister 25 l Canister 200 l Drum
<b>OKS 3770</b>	<b>Hydraulic Oil for Food Processing Technology</b>  ISO VG 46 DIN 51 502: HLP HC 46, VDL HC 46		<ul style="list-style-type: none"> <li>Fully synthetic oil for hydraulic systems, as well as other machine elements</li> <li>For screws and multiple vane rotary vacuum pumps</li> <li>Long operating times due to high temperature and oxidation stability</li> <li>Good wear protection</li> <li>Resistant to steam, alkali and acid disinfectants and cleaning agents</li> </ul>	  OKS 3770: NSF H1 Reg. No. 129962	colourless polyalphaolefine	lower operating temperature: -40 °C upper operating temperature: 135 °C density (at 20 °C): 0.83 g/cm <sup>3</sup> viscosity at (40 °C): 46 mm <sup>2</sup> /s	5 l Canister 25 l Canister 200 l Drum
<b>OKS 3775</b>	<b>Hydraulic Oil for Food Processing Technology</b>  ISO VG 32 DIN 51 502: VDL HC 32, HLP HC 32		<ul style="list-style-type: none"> <li>Fully synthetic oil for hydraulic systems, as well as other machine elements</li> <li>For screws and multiple vane rotary vacuum pumps</li> <li>Long operating times due to high temperature and oxidation stability</li> <li>Good wear protection</li> <li>Resistant to steam, alkali and acid disinfectants and cleaning agents</li> </ul>	  OKS 3775: NSF H1 Reg. No. 143597	colourless polyalphaolefine	lower operating temperature: -45 °C upper operating temperature: 135 °C density (at 20 °C): 0.83 g/cm <sup>3</sup> viscosity at (40 °C): 32 mm <sup>2</sup> /s	5 l Canister 25 l Canister 200 l Drum
<b>OKS 3780</b>	<b>Hydraulic Oil for Food Processing Technology</b>  ISO VG 68 DIN 51 502: HLP HC 68, VDL HC 68		<ul style="list-style-type: none"> <li>Fully synthetic oil for hydraulic systems, as well as other machine elements</li> <li>For screws and multiple vane rotary vacuum pumps</li> <li>Long operating times due to high temperature and oxidation stability</li> <li>Good wear protection</li> <li>Resistant to steam, alkali and acid disinfectants and cleaning agents</li> </ul>	  OKS 3780: NSF H1 Reg. No. 136036	colourless polyalphaolefine	lower operating temperature: -40 °C upper operating temperature: 135 °C density (at 20 °C): 0.83 g/cm <sup>3</sup> viscosity at (40 °C): 68 mm <sup>2</sup> /s	5 l Canister 25 l Canister 200 l Drum
<b>OKS 3790</b>	<b>Sugar-Dissolving Oil, fully synthetic</b>		<ul style="list-style-type: none"> <li>For dissolving sugar deposits and cleaning machine parts</li> <li>Lubrication of precision mechanisms</li> <li>Forming lubricant for packaging</li> <li>Good cleaning and lubrication effect</li> <li>Good wear and corrosion protection</li> <li>Tasteless and odourless emulsion</li> <li>Specially for use in the sweets industry</li> </ul>	  OKS 3790: NSF H1 Reg. No. 128470	colourless water polyglycol	lower operating temperature: -5 °C upper operating temperature: 80 °C density (at 20 °C): 1.06 g/cm <sup>3</sup> viscosity at (40 °C): 20-24 mm <sup>2</sup> /s	5 l Canister 25 l Canister

## Oils

## Oils

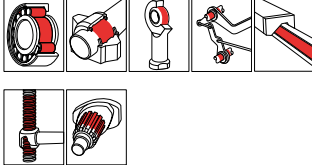


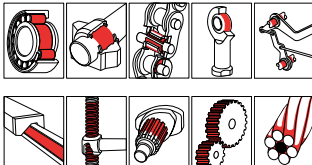

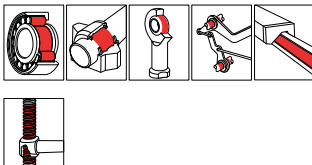

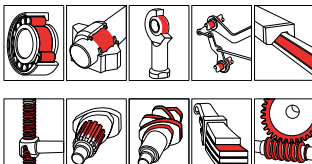

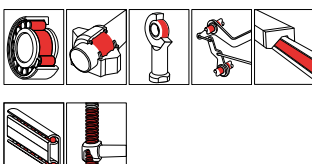



Product	Designation	Fields of Application	Purpose	Properties / Approvals	Main Components	Technical Data	Packaging
<b>OKS 8600</b> <b>OKS 8601*</b>	<b>BIOlogic Multi Oil</b>  ISO VG 32 analogue to DIN 51 502: CLX 32		<ul style="list-style-type: none"> <li>• Universal biodegradable multipurpose oil in the temperature range up to 160°C</li> <li>• Good creep and lubrication properties</li> <li>• VOC-free</li> <li>• Silicone-free</li> <li>• For use in forestry, agriculture and water management</li> </ul>	  biodegradability: CEC-L-33-T-82 > 90 %	yellowish-light brown ester	lower operating temperature: -5 °C upper operating temperature: 160 °C density (at 20 °C): 0.92 g/cm <sup>3</sup> viscosity at (40 °C): 35-40 mm <sup>2</sup> /s	5 l Canister 25 l Canister 200 l Drum 300 ml Spray*



## GREASES FOR LONG-TERM LUBRICATION UNDER CRITICAL OPERATION CONDITIONS

### Greases

### Greases

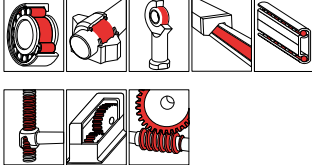

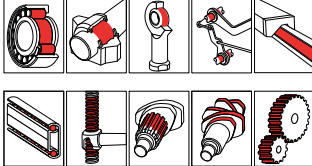

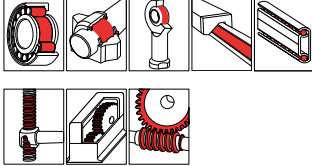

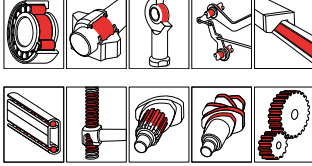

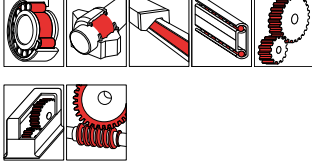

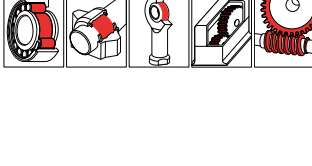

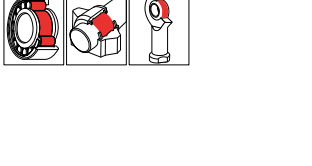

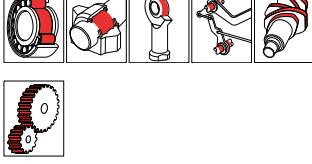

Product	Designation	Fields of Application	Purpose	Properties / Approvals	Main Components	Technical Data	Packaging
<b>OKS 400</b>	<b>MoS<sub>2</sub> Multipurpose High-Performance Grease</b>  DIN 51 502: KPF2K-30		<ul style="list-style-type: none"> <li>For heavily loaded or impact-loaded rolling and friction bearings, spindles and joints</li> <li>Forms an MoS<sub>2</sub> sliding film for emergency running properties</li> <li>Reduces wear</li> <li>Resistant to ageing and oxidation</li> <li>High-pressure grease for universal use</li> </ul>		black MoS <sub>2</sub> EP additives mineral oil thickener: lithium soap	lower operating temperature: -30 °C (≤ 1,400 hPa) upper operating temperature: 120 °C (F50 (A/1500/6000), 100h) consistency: NLGI grade 2 (DIN ISO 2137) viscosity at (40 °C): 100 mm <sup>2</sup> /s (base oil) four-ball test rig welding load: 3,600 N	80 ml Tube 400 ml Cartridge 1 kg Can 5 kg Hobbock 25 kg Hobbock 180 kg Drum
<b>OKS 402</b>	<b>Ball-Bearing High-Performance Grease</b>  DIN 51 502: K2K-30		<ul style="list-style-type: none"> <li>For machine elements such as rolling and friction bearings, spindles and slideways under normal loads</li> <li>Reduces wear</li> <li>Good resistance to pressure and water</li> <li>Resistant to ageing and oxidation</li> <li>Multipurpose grease</li> </ul>		beige mineral oil thickener: lithium soap	lower operating temperature: -30 °C (≤ 1,400 hPa) upper operating temperature: 120 °C (F50 (A/1500/6000), 100h) consistency: NLGI grade 2 (DIN ISO 2137) viscosity at (40 °C): approx. 110 mm <sup>2</sup> /s (base oil) four-ball test rig welding load: 2,000 N	400 ml Cartridge 1 kg Can 5 kg Hobbock 25 kg Hobbock
<b>OKS 403</b>	<b>Marine Grease</b>		<ul style="list-style-type: none"> <li>Lubrication of machine elements subjected to water or sea water</li> <li>Excellent corrosion protection</li> <li>Adheres well</li> <li>Has proven itself in wet operating environments and in coastal and marine areas</li> <li>Suitable as water pump grease</li> </ul>		brown mineral oil thickener: calcium soap	lower operating temperature: -25 °C (≤ 1,400 hPa) upper operating temperature: 80 °C (F50 (A/1500/600), 100h) consistency: NLGI grade 1-2 (DIN ISO 2137) viscosity at (40 °C): 100 mm <sup>2</sup> /s (base oil) four-ball test rig welding load: 3,000 N	400 ml Cartridge 1 kg Can 5 kg Hobbock 25 kg Hobbock 180 kg Drum
<b>OKS 404</b>	<b>High-Performance and High-Temperature Grease</b>  DIN 51 502: KP2P-30		<ul style="list-style-type: none"> <li>For lubricating high pressure loaded rolling and friction bearings in a wide temperature range</li> <li>Reduces wear</li> <li>Good pressure resistance</li> <li>Good water resistance</li> <li>Resistant to ageing and oxidation</li> <li>Good corrosion protection</li> <li>Modern grease with a wide range of applications</li> </ul>		light-coloured mineral oil polyalphaolefine thickener: lithium-complex soap	lower operating temperature: -30 °C (≤ 1,400 hPa) upper operating temperature: 150 °C (F50 (A/1500/6000), 100h) consistency: NLGI grade 2 (DIN ISO 2137) viscosity at (40 °C): 100 mm <sup>2</sup> /s (base oil) four-ball test rig welding load: 2,800 N	400 ml Cartridge 1 kg Can 5 kg Hobbock 25 kg Hobbock 180 kg Drum
<b>OKS 410</b>	<b>MoS<sub>2</sub> High-Pressure Long-Life Grease</b>  DIN 51 502: KPF2K-20		<ul style="list-style-type: none"> <li>Long-term lubrication of lubrication points subjected to pressure or impacts also under outdoor exposure</li> <li>Good emergency running properties</li> <li>Excellent wear protection</li> <li>Good water resistance</li> <li>Highly adhesive</li> <li>For harsh conditions, e.g. in rolling mills, construction and agricultural machines, in mining and port operations</li> </ul>		grey MoS <sub>2</sub> Mo <sub>x</sub> -Active mineral oil thickener: lithium hydroxystearate	lower operating temperature: -20 °C (≤ 1,400 hPa) upper operating temperature: 130 °C (F50 (A/1500/600), 100h) consistency: NLGI grade 2 (DIN ISO 2137) viscosity at (40 °C): 185 mm <sup>2</sup> /s (base oil) four-ball test rig welding load: 3,600 N	400 ml Cartridge 1 kg Can 5 kg Hobbock 25 kg Hobbock 180 kg Drum
<b>Mo<sub>x</sub>-Active</b>							
<b>OKS 416</b>	<b>Low-Temperature and High-Speed Grease</b>  DIN 51 502: KPE2K-50		<ul style="list-style-type: none"> <li>Supple consistency, also at low temperatures</li> <li>Good wear protection</li> <li>High dynamic load-bearing capacity</li> <li>Good corrosion protection</li> <li>Reliable lubrication of conveying equipment and spindle bearings in cold storage houses</li> <li>Suitable as instrument grease</li> </ul>	  biodegradability: CEC-L-33-A94 > 70 %	yellow mineral oil ester thickener: lithium soap	lower operating temperature: -50 °C (≤ 1,400 hPa) upper operating temperature: 120 °C (F50 (A/1500/6000), 100h) consistency: NLGI grade 2 (DIN ISO 2137) viscosity at (40 °C): 15 mm <sup>2</sup> /s (base oil) four-ball test rig welding load: 2,400 N	400 ml Cartridge 1 kg Can 5 kg Hobbock
<b>OKS 418</b>	<b>High-Temperature Grease</b>  analogue to DIN 51 502: KPF2N-20		<ul style="list-style-type: none"> <li>Lubrication of friction and rolling bearings at higher temperatures</li> <li>Long-term lubrication of lubrication points subjected to high pressure</li> <li>Good wear protection</li> <li>Good resistance to oxidation and ageing</li> <li>Economic hot bearing grease without drop point</li> </ul>		black MoS <sub>2</sub> mineral oil thickener: silicate	lower operating temperature: -25 °C (< 1,400 hPa) upper operating temperature: 150 °C (F50 (A/1500/600), 100h) consistency: NLGI grade 2 (DIN ISO 2137) viscosity at (40 °C): 220 mm <sup>2</sup> /s (base oil)	1 kg Can 5 kg Hobbock 25 kg Hobbock



## GREASES FOR LONG-TERM LUBRICATION UNDER CRITICAL OPERATION CONDITIONS

### Greases







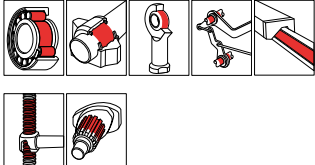

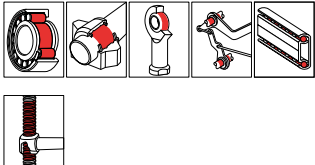

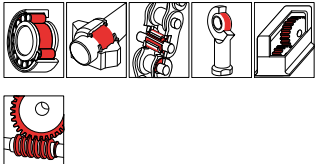

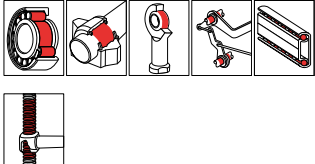

### Greases

Product	Designation	Fields of Application	Purpose	Properties / Approvals	Main Components	Technical Data	Packaging
<b>OKS 420</b>	<b>High-Temperature Multipurpose Grease</b>		<ul style="list-style-type: none"> <li>For rolling and friction bearings, slow-running gears and chains at high temperatures, impact and pressure loads or water influences</li> <li>Extremely impact and pressure-resistant</li> <li>Good wear protection</li> <li>Highly adhesive</li> <li>For universal use at increased requirements</li> <li>Also available as fluid grease, NLGI 00</li> </ul>		beige Mo <sub>x</sub> -Active mineral oil thickener: polycarbamide	lower operating temperature: -10 °C (≤ 1,400 hPa) upper operating temperature: 160 °C consistency: NLGI grade 1-2 (DIN ISO 2137) viscosity at (40 °C): 490 mm <sup>2</sup> /s (base oil)	400 ml Cartridge 1 kg Can 5 kg Hobbock 25 kg Hobbock 180 kg Drum
<b>Mo<sub>x</sub>-Active</b>	analogue to DIN 51 502: KP1-2P-10						
<b>OKS 422</b>	<b>Universal Grease for Long-Life Lubrication</b>		<ul style="list-style-type: none"> <li>For rolling and friction bearings and spindles at extreme temperatures or high speeds</li> <li>Extremely impact and pressure-resistant</li> <li>Excellent wear protection</li> <li>Long regreasing intervals</li> <li>Use outside normal performance areas</li> <li>Spindle bearing lubrication at machine tools</li> </ul>		light-coloured polyalphaolefine thickener: barium-complex soap	lower operating temperature: -40 °C (≤ 1,400 hPa) upper operating temperature: 140 °C (F50 (A/1500/6000), 100h) consistency: NLGI grade 2 (DIN ISO 2137) viscosity at (40 °C): 50 mm <sup>2</sup> /s (base oil) four-ball test rig welding load: 3,400 N	400 ml Cartridge 1 kg Can 5 kg Hobbock 25 kg Hobbock 180 kg Drum
	DIN 51 502: KPHC2N-40						
<b>OKS 424</b>	<b>Synthetic High-Temperature Grease</b>		<ul style="list-style-type: none"> <li>For rolling and friction bearings at high temperatures and high loads</li> <li>Good temperature resistance</li> <li>Good plastic and elastomer compatibility</li> <li>Good resistance against aggressive environmental influences</li> <li>Suitable for lubrication of exhaust-gas fans</li> </ul>		beige polyalphaolefine thickener: polycarbamide	lower operating temperature: -40 °C (≤ 1,400 hPa) upper operating temperature: 200 °C consistency: NLGI grade 1-2 (DIN ISO 2137) viscosity at (40 °C): 400 mm <sup>2</sup> /s (base oil)	400 ml Cartridge 1 kg Can 5 kg Hobbock 25 kg Hobbock 180 kg Drum
	DIN 51 502: KHC1-2S-40						
<b>OKS 425</b>	<b>Synthetic Long-Life Grease</b>		<ul style="list-style-type: none"> <li>Long-term or for-life lubrication of machine elements that are subjected to high pressures and high temperatures</li> <li>Excellent wear protection</li> <li>For high speeds</li> <li>Good temperature resistance</li> <li>Spindle-bearing lubrication</li> </ul>		beige polyalphaolefine thickener: special calcium soap	lower operating temperature: -50 °C (≤ 1,400 hPa) upper operating temperature: 130 °C (F50 (A/1500/6000), 100h) consistency: NLGI grade 2 (DIN ISO 2137) viscosity at (40 °C): 30 mm <sup>2</sup> /s (base oil) four-ball test rig welding load: 3,400 N	400 ml Cartridge 1 kg Can 25 kg Hobbock
	DIN 51 502: KPHC2K-50						
<b>OKS 427</b>	<b>Gear and Bearing Grease</b>		<ul style="list-style-type: none"> <li>For relatively slow-running gears, alternatively to oil lubrication</li> <li>Lubrication of drive and transport chains, rolling and friction bearings</li> <li>For high pressures, also at impact loads</li> <li>Minimising of the losses for leaks in comparison to oil lubrication</li> <li>Excellent wear protection</li> </ul>		brownish mineral oil synthetic oil thickener: polycarbamide	lower operating temperature: -15 °C upper operating temperature: 160 °C consistency: NLGI grade 0-00 (DIN ISO 2137) viscosity at (40 °C): 490 mm <sup>2</sup> /s (base oil)	1 kg Can 5 kg Hobbock 25 kg Hobbock
	analogue to DIN 51 502: GP0/00P-10						
<b>OKS 428</b>	<b>Fluid Grease for Gears, synthetic</b>		<ul style="list-style-type: none"> <li>For heavily loaded gearing exposed to weather outdoors and/or low temperatures, as well as angled or vertical shafts, also with gear designs which are not oil-tight</li> <li>For friction bearings with low clearance or high speeds</li> <li>For high pressures and impact loads</li> </ul>		brown polyglycol thickener: lithium hydroxystearate	lower operating temperature: -30 °C (≤ 1,400 hPa) upper operating temperature: 120 °C (F50 (A/1500/6000), 100h) consistency: NLGI grade 00 (DIN ISO 2137) viscosity at (40 °C): 120 mm <sup>2</sup> /s (base oil) four-ball test rig welding load: 3,000 N	1 kg Can 5 kg Hobbock 25 kg Hobbock
	DIN 51 502: GPPG00K-40						
<b>OKS 432</b>	<b>High Melting-Point Grease</b>		<ul style="list-style-type: none"> <li>For rolling and friction bearings and similar components, at high loads and temperatures</li> <li>Excellent wear protection</li> <li>Good resistance to oxidation and ageing</li> <li>Good pressure resistance</li> <li>Maintenance of lubricating effect even at high temperatures</li> </ul>		brown mineral oil thickener: aluminium-complex soap	lower operating temperature: -25 °C (≤ 1,400 hPa) upper operating temperature: 190 °C (F50 (A/1500/600), 100h) consistency: NLGI grade 2 (DIN ISO 2137) viscosity at (40 °C): 230 mm <sup>2</sup> /s (base oil) four-ball test rig welding load: 2,800 N	400 ml Cartridge 1 kg Can 5 kg Hobbock 25 kg Hobbock 180 kg Drum
	DIN 51 502: KP2R-20						
<b>OKS 433</b>	<b>Long-Acting High-Pressure Grease</b>		<ul style="list-style-type: none"> <li>For friction and rolling bearings at high pressures</li> <li>EP additives</li> <li>Good wear protection</li> <li>Good resistance to oxidation and ageing</li> <li>For heavily loaded rolling and taper roller bearings, e.g. on rolling stands, hot and cold shearing systems, sliding blocks and spindles</li> </ul>		red-brown mineral oil thickener: lithium hydroxystearate	lower operating temperature: -20 °C (≤ 1,400 hPa) upper operating temperature: 120 °C (F50 (A/1500/6000), 100h) consistency: NLGI grade 2 (DIN ISO 2137) viscosity at (40 °C): 185 mm <sup>2</sup> /s (base oil) four-ball test rig welding load: 2,600 N	400 ml Cartridge 1 kg Can 5 kg Hobbock 25 kg Hobbock
	DIN 51 502: KP2K-20						

## GREASES FOR LONG-TERM LUBRICATION UNDER CRITICAL OPERATION CONDITIONS

## Greases

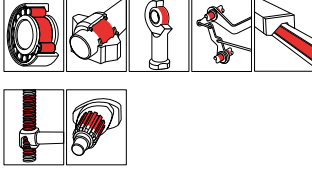


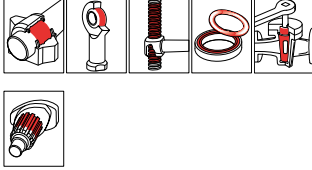



























## Greases

Product	Designation	Fields of Application	Purpose	Properties / Approvals	Main Components	Technical Data	Packaging
<b>OKS 464</b>	<b>Electrically Conductive Rolling Bearing Grease</b>  DIN 51 502: KHC2N-40		<ul style="list-style-type: none"> <li>Special grease for long-term lubrication of rolling and friction bearings for avoiding electrostatic charging</li> <li>Good resistance to oxidation and ageing in rolling bearings</li> <li>For bearings in motors, sheet drawing systems, sheet printing machines, etc.</li> </ul>		black carbon polyalphaolefine thickener: lithium soap	lower operating temperature: -40 °C (≤ 1,400 hPa) upper operating temperature: 150 °C (F50 (A/1500/6000), > 100h) consistency: NLGI grade 2 (DIN ISO 2137) viscosity at (40 °C): 150 mm <sup>2</sup> /s (base oil) specific resistivity: < 10 1/Ω cm (electrode distance 1cm)	400 ml Cartridge 1 kg Can
<b>OKS 468</b>	<b>Plastic and elastomer adhesive lubricant</b>		<ul style="list-style-type: none"> <li>Silicone-free lubricant and sealing lubricant for plastic/plastic and plastic/metal combinations</li> <li>Good elastomer and plastic compatibility</li> <li>EPDM compatible</li> <li>Silicone-free, highly adhesive</li> </ul>	  OKS 468: NSF H1 Reg. No. 135591	transparent polyalphaolefine thickener: inorganic	lower operating temperature: -25 °C upper operating temperature: 150 °C viscosity at (40 °C): 1,700 mm <sup>2</sup> /s (base oil)	1 kg Can 5 kg Hobbock
<b>OKS 469</b>	<b>Plastic and Elastomer Grease</b>		<ul style="list-style-type: none"> <li>Silicone-free lubricant and sealing lubricant for plastic/plastic and plastic/metal combinations</li> <li>Good elastomer and plastic compatibility</li> <li>Silicone-free</li> <li>Tested for beer foam compatibility</li> </ul>	  OKS 469: NSF H1 Reg. No. 131380 Tested for beer foam compatibility	transparent polyalphaolefine thickener: inorganic	lower operating temperature: -25 °C upper operating temperature: 150 °C viscosity at (40 °C): 400 mm <sup>2</sup> /s (base oil)	1 kg Can
<b>OKS 470</b> <b>OKS 471*</b>	<b>White Universal High-Performance Grease</b>  DIN 51 502: KF2K-30		<ul style="list-style-type: none"> <li>For heavily loaded rolling and friction bearings, spindles and slideways when dark-coloured lubricants cannot be used</li> <li>Good pressure properties</li> <li>Reduces wear</li> <li>Resistant to ageing and oxidation</li> <li>Waterproof</li> </ul>	  OKS 470: NSF H2 Reg. No. 137707	white white solid lubricants mineral oil thickener: lithium hydroxystearate	lower operating temperature: -30 °C (≤ 1,400 hPa) upper operating temperature: 120 °C (F50 (A/1500/6000), 100h) consistency: NLGI grade 2 (DIN ISO 2137) viscosity at (40 °C): approx. 110 mm <sup>2</sup> /s (base oil) four-ball test rig welding load: 3,400 N	80 ml Tube 400 ml Cartridge 1 kg Can 5 kg Hobbock 25 kg Hobbock 180 kg Drum 400 ml Spray*
<b>OKS 472</b>	<b>Low-Temperature Grease for Food Processing Technology</b>  DIN 51 502: KHC1K-40		<ul style="list-style-type: none"> <li>Lubrication of rolling and friction bearings with minimal bearing play and high speeds, at low temperatures as well as low coasting torques</li> <li>Functionality of the lubricating film up to -70 °C</li> <li>Reduces wear</li> <li>Good resistance to ageing and oxidation</li> <li>For bearings in cold storage houses, ice factories, etc.</li> </ul>	  OKS 472: NSF H1 Reg. No. 135749	whitish ester polyalphaolefine thickener: aluminium-complex soap	lower operating temperature: -45 °C (≤ 1,400 hPa) upper operating temperature: 120 °C (F50 (A/1500/6000), 100h) consistency: NLGI grade 1 (DIN ISO 2137) viscosity at (40 °C): 30 mm <sup>2</sup> /s (base oil)	400 ml Cartridge 1 kg Can 5 kg Hobbock 25 kg Hobbock
<b>OKS 473</b>	<b>Fluid Grease for food processing technology</b>  analogue to DIN 51 502: GPHC00K-40, KPHC00K-40		<ul style="list-style-type: none"> <li>For closed gears, rolling and friction bearings, joints or chains if grease lubrication is provided for</li> <li>Also suitable for higher speed, minimal bearing play or slight gear clearance</li> <li>Reduces wear, waterproof</li> <li>Can be conveyed well using central lubricating systems</li> </ul>	  OKS 473: NSF H1 Reg. No. 140485	light yellow polyalphaolefine thickener: aluminium-complex soap	lower operating temperature: -45 °C upper operating temperature: 120 °C consistency: NLGI grade 0-00 (DIN ISO 2137) viscosity at (40 °C): 160 mm <sup>2</sup> /s (base oil)	1 kg Can 5 kg Hobbock 25 kg Hobbock
<b>OKS 475</b>	<b>High-Performance Grease</b>  DIN 51 502: KFHC2K-60		<ul style="list-style-type: none"> <li>For bearings with minimal bearing play and high speeds, at low and high temperatures and for bearings with low coasting torque</li> <li>Good wear protection through PTFE</li> <li>Lubrication of components made of glass fibre reinforced plastic</li> <li>For fast-running bearings in the textile industry, in filling and packaging machines</li> </ul>	  OKS 475: NSF H2 Reg. No. 137708	beige PTFE polyalphaolefine thickener: lithium hydroxystearate	lower operating temperature: -60 °C (≤ 1,400 hPa) upper operating temperature: 120 °C (F50 (A/1500/6000), 100h) consistency: NLGI grade 2 (DIN ISO 2137) viscosity at (40 °C): approx. 30 mm <sup>2</sup> /s (base oil) four-ball test rig welding load: 2,000 N	400 ml Cartridge 1 kg Can 5 kg Hobbock 25 kg Hobbock 170 kg Drum

## GREASES FOR LONG-TERM LUBRICATION UNDER CRITICAL OPERATION CONDITIONS

## Greases

## Greases

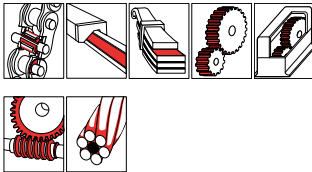













Product	Designation	Fields of Application	Purpose	Properties / Approvals	Main Components	Technical Data	Packaging
<b>OKS 476</b>	<b>Multipurpose Grease for Food Processing Technology</b>  analogue to DIN 51 502: KP2K-30		<ul style="list-style-type: none"> <li>For rolling and friction bearings and other machine elements</li> <li>Resistant to cold and hot water as well as disinfectants and cleaning agents</li> <li>Resistance to oxidation</li> <li>Reduces wear</li> <li>Multipurpose grease for universal use in food processing technology</li> </ul>	   OKS 476: NSF H1 Reg. No. 137619	white semi-synthetic oil thickener: aluminium-complex soap	lower operating temperature: -30 °C (≤ 1,400 hPa) upper operating temperature: 110 °C consistency: NLGI grade 2 (DIN ISO 2137) viscosity at (40 °C): 240 mm <sup>2</sup> /s (base oil) four-ball test rig welding load: 2,200 N	400 ml Cartridge 1 kg Can 5 kg Hobbock 25 kg Hobbock 180 kg Drum
<b>OKS 477</b>	<b>Valve Grease for Food Processing Technology</b>  DIN 51 502: MHC3N-10		<ul style="list-style-type: none"> <li>Sealing lubrication of adapted sliding surfaces</li> <li>Lubrication of plastics and elastomers</li> <li>Lubrication of slow-running bearings</li> <li>Highly adhesive, seals well</li> <li>Resistant to water and steam</li> <li>Does not affect the quality properties of beer foam</li> <li>Can also be used as sealing grease</li> </ul>	    OKS 477: NSF H1 Reg. No. 135750 Tested for beer foam compatibility UBA guideline (D): test certificate HyCert-2-347253-21-Hy210	light brown polyalphaolefine thickener: silicate	lower operating temperature: -10 °C upper operating temperature: 140 °C consistency: NLGI grade 3 (DIN ISO 2137) viscosity at (40 °C): 1,600 mm <sup>2</sup> /s (base oil)	80 ml Tube 1 kg Can 5 kg Hobbock
<b>OKS 478</b>	<b>Plastic and Elastomer Grease</b>  analogue to DIN 51 502: MHC3S-40		<ul style="list-style-type: none"> <li>Plastic and elastomer grease for plastic/plastic and plastic/metal combinations</li> <li>Silicone-free</li> <li>High shear stability</li> <li>Excellent adhesion on plastics and metals</li> </ul>	     OKS 478: NSF H1 Reg. No. 129960	beige polyalphaolefine thickener: inorganic	lower operating temperature: -40 °C upper operating temperature: 200 °C consistency: NLGI grade 3 (DIN ISO 2137) viscosity at (40 °C): > 1,700 mm <sup>2</sup> /s (base oil)	400 ml Cartridge 1 kg Can 5 kg Hobbock 25 kg Hobbock
<b>OKS 479</b>	<b>High-Temperature Grease for Food Processing Technology</b>  analogue to DIN 51 502: KPHC1K-30		<ul style="list-style-type: none"> <li>Lubrication of rolling and friction bearings at increased operating temperatures</li> <li>Good adhesive strength on metal surfaces</li> <li>Resistant to hot and cold water, water vapour, watery-alkaline and acidic disinfectants and cleaning agents</li> <li>Good resistance to oxidation and ageing</li> <li>For all sections of the food processing, beverage and pharmaceutical industries</li> </ul>	   OKS 479: NSF H1 Reg. No. 135675	beige polyalphaolefine thickener: aluminium-complex soap	lower operating temperature: -35 °C (≤ 1,400 hPa) upper operating temperature: 120 °C (F50 (A/1500/6000), > 100h) consistency: NLGI grade 1 (DIN ISO 2137) viscosity at (40 °C): 360 mm <sup>2</sup> /s (base oil)	400 ml Cartridge 1 kg Can 5 kg Hobbock 25 kg Hobbock
<b>OKS 480</b> <b>OKS 481*</b>	<b>Waterproof High-Pressure Grease for Food Processing Technology</b>  analogue to DIN 51 502: KPHC2P-30		<ul style="list-style-type: none"> <li>For heavily loaded rolling and friction bearings in food processing technology</li> <li>Excellent resistance to hot and cold water as well as disinfectants and cleaning agents</li> <li>Excellent corrosion protection</li> <li>High shear, temperature and oxidation stability</li> </ul>	     OKS 480: NSF H1 Reg. No. 148971 OKS 481: NSF H1 Reg. No. 153878	beige polyalphaolefine thickener: calcium sulphonate complex soap	lower operating temperature: -30 °C upper operating temperature: 160 °C consistency: NLGI grade 2 (DIN ISO 2137) viscosity at (40 °C): 100 mm <sup>2</sup> /s (base oil) four-ball test rig welding load: 4,000 N	400 ml Cartridge 1 kg Can 5 kg Hobbock 25 kg Hobbock 400 ml Spray*
<b>OKS 490</b>	<b>Gear lubrication grease, sprayable</b>  DIN 51 502: OG PF 0 S-30		<ul style="list-style-type: none"> <li>For gears with highest pressures and high circumferential speeds</li> <li>Lubrication of guides and slide rails</li> <li>Excellent pressure resistance through EP additives and solid lubricants</li> <li>Protection of the tooth flanks, also at long relubrication intervals</li> </ul>	      OKS 490: NSF H1 Reg. No. 153878	black graphite EP additives mineral oil thickener: aluminium soap	lower operating temperature: -30 °C (lubricating film) upper operating temperature: 220 °C (at relubrication) consistency: NLGI grade 0 (DIN ISO 2137) viscosity at (40 °C): 1,000 mm <sup>2</sup> /s (base oil) four-ball test rig welding load: approx. 6,500 N FZG wear protection test: power level > 12 (A2/76/50)	1 kg Can 5 kg Hobbock 25 kg Hobbock 180 kg Drum
<b>OKS 491</b>	<b>Open Gear Spray, dry</b>		<ul style="list-style-type: none"> <li>Dry lubrication of slowly-turning, open pinion gears, steel cables etc. subjected to high pressures, dust or corrosive influences, such as outdoor weathering</li> <li>Prevents adhesion of dust and dirt</li> </ul>	     OKS 491: NSF H1 Reg. No. 153878	black bitumen graphite	lower operating temperature: -30 °C upper operating temperature: 100 °C	400 ml Spray



## GREASES FOR LONG-TERM LUBRICATION UNDER CRITICAL OPERATION CONDITIONS

## Greases

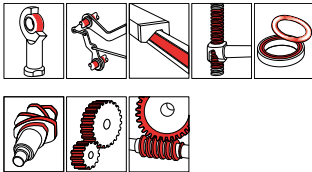

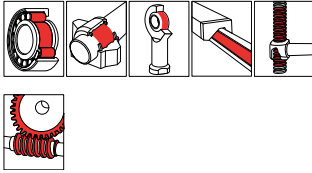









## Greases

Product	Designation	Fields of Application	Purpose	Properties / Approvals	Main Components	Technical Data	Packaging
<b>OKS 495</b>	<b>Adhesive Lubricant</b>		<ul style="list-style-type: none"> <li>• Priming of heavily loaded tooth flanks and sliding surfaces</li> <li>• Run-in lubrication to avoid damage</li> <li>• Excellent pressure resistance</li> <li>• Lubrication of jackscrews in the motor vehicle and train technology</li> <li>• Gear rack lubrication in conveying equipment</li> </ul>		black graphite EP additives synthetic oil mineral oil thickener: aluminium-complex soap	lower operating temperature: -40 °C (functionality lubricating film) upper operating temperature: 200 °C (depending on relubrication) consistency: NLGI grade 1 (DIN ISO 2137) viscosity at (40 °C): 500 mm <sup>2</sup> /s (base oil) four-ball test rig welding load: 4,200 N FZG wear protection test: power level > 12 (A2/76/50)	1 kg Can 5 kg Hobbock 25 kg Hobbock
<b>OKS 1110</b> <b>OKS 1111*</b>	<b>Multi-Silicone Grease</b>		<ul style="list-style-type: none"> <li>• For fittings, seals and plastic parts</li> <li>• Resistant to media</li> <li>• Excellent compatibility to plastic</li> <li>• No drying out or bleeding</li> <li>• Highly adhesive, tasteless and odourless</li> <li>• Silicone grease for a broad range of applications</li> </ul>	 OKS 1110: NSF H1 Reg. No. 124381 Tested for beer foam compatibility UBA guideline (D): test certificate OFI-1085-0753 ACS-conformity to positive lists (F): test certificate 22 CLP LY 024	transparent polydimethylsiloxane thickener: inorganic	lower operating temperature: -40 °C upper operating temperature: 200 °C consistency: NLGI grade 3 (DIN ISO 2137) viscosity at (40 °C): 9,500 mm <sup>2</sup> /s (base oil)	10 ml Tube 80 ml Tube 400 ml Cartridge 4 g Tube 500 g Can 1 kg Can 5 kg Hobbock 25 kg Hobbock 180 kg Drum 400 ml Spray*
<b>OKS 1112</b>	<b>Silicone Grease for Vacuum Valves</b>		<ul style="list-style-type: none"> <li>• For slide valves and valves</li> <li>• Excellent media resistance, e.g. to cold and hot water, acetone, ethanol, ethylene glycol, glycerin and methanol</li> <li>• Adheres and seals well</li> <li>• For use in vacuum plants and laboratory equipment</li> </ul>		transparent polydimethylsiloxane thickener: inorganic	lower operating temperature: -30 °C upper operating temperature: 200 °C consistency: NLGI grade 3 (DIN ISO 2137) evaporation loss: < 3 percent in weight (24h, 200 °C)	500 g Can 5 kg Hobbock
<b>OKS 1133</b>	<b>Low-Temperature Silicone Grease</b>		<ul style="list-style-type: none"> <li>• Lubrication of rolling and friction bearings, bowden cables and fittings</li> <li>• Neutral with regard to plastics and elastomers</li> <li>• Lubrication of motors, drives, control systems under arctic conditions</li> </ul>		transparent polyphenylmethylsiloxane thickener: lithium hydroxystearate	lower operating temperature: -73 °C upper operating temperature: 200 °C consistency: NLGI grade 2 (DIN ISO 2137) viscosity at (25 °C): 100 mm <sup>2</sup> /s (base oil) four-ball test rig welding load: 1,200 N	500 g Can 5 kg Hobbock 25 kg Hobbock
<b>OKS 1140</b>	<b>Extreme-Temperature Silicone Grease</b>		<ul style="list-style-type: none"> <li>• For slow-running machine elements at extremely high temperatures</li> <li>• Minimal evaporation losses</li> <li>• For bearings at kilns, hardening furnaces, bakery machines, drying tunnels, foundry machines, boiler firing systems, plastics processing machines or welding and soldering machines etc.</li> </ul>		black polyphenylmethylsiloxane thickener: special carbon black	lower operating temperature: -20 °C (≤ 1,400 hPa) upper operating temperature: 290 °C consistency: NLGI grade 2 (DIN ISO 2137) viscosity at (40 °C): 100 mm <sup>2</sup> /s (base oil) four-ball test rig welding load: 2,100 N	500 g Can 5 kg Hobbock 25 kg Hobbock
<b>OKS 1144</b>	<b>Universal Silicone Grease</b>		<ul style="list-style-type: none"> <li>• For bearings at changing temperatures and medium speeds</li> <li>• Good resistance to oxidation and ageing</li> <li>• Neutral with regard to plastics and elastomers</li> <li>• Lubrication of smaller bearings, e.g. of turbo-superchargers, blowers, water pumps, washing machines and driers</li> </ul>		beige polyphenylmethylsiloxane thickener: lithium hydroxystearate	lower operating temperature: -40 °C upper operating temperature: 200 °C consistency: NLGI grade 2 (DIN ISO 2137) viscosity at (25 °C): 125 mm <sup>2</sup> /s (base oil) four-ball test rig welding load: 1,100 N	500 g Can 5 kg Hobbock 25 kg Hobbock
<b>OKS 1149</b>	<b>Silicone Grease with PTFE</b>		<ul style="list-style-type: none"> <li>• Lubrication of plastic/plastic, plastic/metal, and elastomer/metal combinations at low to medium bearing loads and speeds</li> <li>• Use in a broad temperature range and good low temperature conditions</li> <li>• High oxidation stability</li> <li>• Excellent corrosion protection</li> </ul>		white PTFE EP additives silicone oil thickener: lithium-complex soap	lower operating temperature: -50 °C (≤ 1,400 hPa) upper operating temperature: 180 °C consistency: NLGI grade 2-3 (DIN ISO 2137) viscosity at (25 °C): 200 mm <sup>2</sup> /s (base oil)	400 ml Cartridge 500 g Can 5 kg Hobbock 25 kg Hobbock

## GREASES FOR LONG-TERM LUBRICATION UNDER CRITICAL OPERATION CONDITIONS

## Greases

## Greases

Product	Designation	Fields of Application	Purpose	Properties / Approvals	Main Components	Technical Data	Packaging
<b>OKS 1155</b>	<b>Adherent Silicone Grease</b>  DIN 51 502: MS12R-60		<ul style="list-style-type: none"> <li>For sliding points between rubber and metals or plastics at low speeds</li> <li>Excellent resistance to oxidation and ageing</li> <li>Neutral with regard to plastics and elastomers</li> <li>Highly adhesive. Seals well</li> <li>For O-rings in pneumatic systems of brake systems</li> </ul>		beige ester polyphenylmethylsiloxane thickener: lithium hydroxystearate	lower operating temperature: -65 °C upper operating temperature: 175 °C consistency: NLGI grade 2 (DIN ISO 2137) viscosity at (25 °C): 100 mm <sup>2</sup> /s (base oil)	500 g Can 5 kg Hobbock 25 kg Hobbock
<b>OKS 4100</b>	<b>MoS<sub>2</sub> Extreme Pressure Grease</b>  DIN 51 502: KPF2K-20		<ul style="list-style-type: none"> <li>For slow-running rolling and friction bearings at very high, also shock-type loads</li> <li>Good emergency running properties through MoS<sub>2</sub> sliding film</li> <li>Excellent wear protection</li> <li>Good water resistance, also during high quantities of water</li> <li>Highly adhesive</li> <li>For harsh operating conditions, e.g. in stone crushers</li> </ul>		black graphite MoS <sub>2</sub> mineral oil thickener: lithium-calcium soap	lower operating temperature: -20 °C (< 1,400 hPa) upper operating temperature: 120 °C (F50 (A/1500/600), 100h) consistency: NLGI grade 2 (DIN ISO 2137) viscosity at (40 °C): 1,020 mm <sup>2</sup> /s (base oil) four-ball test rig welding load: > 4,000 N	400 ml Cartridge 5 kg Hobbock 25 kg Hobbock
<b>OKS 4200</b>	<b>Synthetic High-Temperature Bearing Grease with MoS<sub>2</sub></b>  DIN 51 502: KHCF2R-10		<ul style="list-style-type: none"> <li>Long-term lubrication of rolling and friction bearings subjected to high temperatures</li> <li>Extremely impact and pressure-resistant</li> <li>Excellent wear protection</li> <li>Functionally reliable across a wide temperature range</li> <li>For fans, blowers, autoclaves, drying ovens, systems in metallurgical works and steelworks</li> </ul>		black MoS <sub>2</sub> special mineral oil polyalphaolefine thickener: bentonite	lower operating temperature: -10 °C (< 1,400 hPa) upper operating temperature: 180 °C (F50 (A/1500/600), 100h) consistency: NLGI grade 2 (DIN ISO 2137) viscosity at (40 °C): 220 mm <sup>2</sup> /s (base oil) four-ball test rig welding load: 2,600 N	400 ml Cartridge 1 kg Can 5 kg Hobbock 25 kg Hobbock 180 kg Drum
<b>OKS 4210</b>	<b>Extreme Temperature Grease</b>  DIN 51 502: KFFK2U-40		<ul style="list-style-type: none"> <li>Long-term lubrication of rolling and friction bearings subjected to extremely high temperatures</li> <li>Resistant to water, steam and chemicals</li> <li>Excellent wear protection</li> <li>Excellent plastic and elastomer compatibility</li> <li>For bearings in burn-in and drying furnaces, boiler plants, roller and conveyor rollers in continuous furnaces</li> </ul>		white PTFE perfluoropolyether (PFPE) thickener: PTFE	lower operating temperature: -40 °C (< 1,400 hPa) upper operating temperature: 280 °C (F50 (A/1500/6000), 100h) consistency: NLGI grade 2 (DIN ISO 2137) viscosity at (40 °C): 390 mm <sup>2</sup> /s (base oil) four-ball test rig welding load: 9,000 N	800 g Cartridge 1 kg Can 5 kg Hobbock 25 kg Hobbock
<b>OKS 4220</b>	<b>Extreme-Temperature Bearing Grease</b>  analogue to DIN 51 502: KFFK2U-40		<ul style="list-style-type: none"> <li>Long-term lubrication of rolling and friction bearings</li> <li>Excellent temperature resistance</li> <li>Excellent media resistance</li> <li>Excellent plastic and elastomer compatibility</li> <li>Excellent water, steam resistance</li> <li>Excellent wear protection</li> </ul>		white PTFE perfluoropolyether (PFPE) thickener: PTFE	lower operating temperature: -40 °C (< 1,400 hPa) upper operating temperature: 280 °C consistency: NLGI grade 2 (DIN ISO 2137) viscosity at (40 °C): 390 mm <sup>2</sup> /s (base oil) four-ball test rig welding load: > 10,000 N	40 ml Tube 500 g Can 800 g Cartridge 1 kg Can 5 kg Hobbock 25 kg Hobbock
<b>OKS 4240</b>	<b>Special Grease for Ejector Pins</b>  DIN 51 502: MFFK2U-20		<ul style="list-style-type: none"> <li>Long-term lubrication of rolling and friction bearings at extremely high temperatures and aggressive media</li> <li>Resistant to plastics or elastomers</li> <li>Excellent temperature resistance</li> <li>For the lubrication of ejector pins in the plastics industry</li> </ul>		white PTFE perfluoropolyether (PFPE) thickener: inorganic	lower operating temperature: -20 °C upper operating temperature: 300 °C consistency: NLGI grade 2 (DIN ISO 2137) viscosity at (40 °C): 440 mm <sup>2</sup> /s (base oil) four-ball test rig welding load: 4,800 N	250 g Dispenser 1 kg Can

**Dry lubricants**

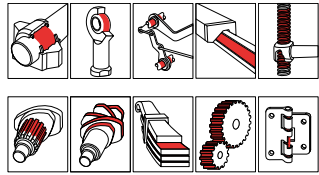

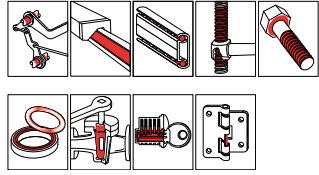







**Dry lubricants**

Product	Designation	Fields of Application	Purpose	Properties / Approvals	Main Components	Technical Data	Packaging
<b>OKS 100</b>	MoS <sub>2</sub> Powder, high degree of purity		<ul style="list-style-type: none"> <li>To improve the sliding properties of machine elements</li> <li>Run-in lubricant in combination with oil or grease lubrication</li> <li>Prevents friction and wear</li> <li>Not electroconductive</li> <li>For integration in plastics, seals and packings</li> </ul>		grey-black MoS <sub>2</sub>	lower operating temperature: -185 °C particle size: 16,0-30,0 µm / max. 190 µm (d 50 / max. d 99)	250 g Can 1 kg Can 5 kg Hobbock 25 kg Hobbock
<b>OKS 110</b> <b>OKS 111*</b>	MoS <sub>2</sub> Powder, microsize		<ul style="list-style-type: none"> <li>Run-in lubricant in combination with oils or greases</li> <li>Not electroconductive</li> <li>For pressing in bearings</li> <li>Prevents friction and wear, even at high pressures</li> <li>Good adhesion, even at extremely precision-machined surfaces</li> </ul>		grey-black MoS <sub>2</sub>	lower operating temperature: -185 °C particle size: 2,5-5,0 µm / max. 15 µm (d 50 / max. d 99)	1 kg Can 5 kg Hobbock 25 kg Hobbock 400 ml Spray*
<b>OKS 510</b> <b>OKS 511*</b>	MoS <sub>2</sub> Bonded Coating, fast-drying		<ul style="list-style-type: none"> <li>Dry lubrication for temporary operation or long downtimes, industry environments and at low sliding speeds</li> <li>Run-in lubricant in combination with oils or greases</li> <li>Creates emergency-running properties</li> <li>Dries at room temperature</li> </ul>		grey-black MoS <sub>2</sub> graphite	lower operating temperature: -180 °C upper operating temperature: 450 °C press-fit test (µ): 0,07, no chatter	500 g Can 5 kg Hobbock 25 kg Hobbock 400 ml Spray*
<b>OKS 521</b>	MoS <sub>2</sub> Bonded Coating, air-hardening, Spray		<ul style="list-style-type: none"> <li>Air-hardening bonded coating on MoS<sub>2</sub>-graphite basis</li> <li>Dry lubrication of machine elements subject to high demands</li> <li>Use in a broad temperature range at low to medium rotational speeds</li> <li>Rapid curing at room temperature</li> <li>Thin film layer</li> </ul>		black graphite MoS <sub>2</sub>	lower operating temperature: -180 °C upper operating temperature: 450 °C density (at 20 °C): 1.05 g/cm <sup>3</sup>	400 ml Spray
<b>OKS 530</b>	MoS <sub>2</sub> Bonded Coating, water-based, air-drying		<ul style="list-style-type: none"> <li>Lubrication of heavily loaded chains when oil and grease lubrication is no longer possible</li> <li>Wear protection for increased service life</li> <li>No adhesion of dust and dirt</li> <li>Good adhesion to metal</li> <li>Can be used under vacuum</li> <li>Can be diluted with water in ratio of up to 1:1</li> </ul>		black graphite MoS <sub>2</sub>	lower operating temperature: -35 °C upper operating temperature: 450 °C press-fit test (µ): 0,10, no chatter thread friction coefficient (µ total): 0.05 (M10: 8.8/10 black-oxide)	1 kg Can 5 kg Canister 25 kg Canister
<b>OKS 536</b>	Graphite Bonded Coating, water-based, air-drying		<ul style="list-style-type: none"> <li>Lubrication of heavily loaded chains when oil and grease lubrication is no longer possible</li> <li>Can be sprayed onto hot surfaces</li> <li>Use in a broad temperature range</li> <li>Dries at room temperature</li> <li>Spent sliding film can be topped up</li> <li>Can be diluted with water in ratio of up to 1:5</li> </ul>		black graphite	lower operating temperature: -35 °C upper operating temperature: 600 °C press-fit test (µ): 0,12, no chatter	5 kg Canister 25 kg Canister
<b>OKS 570</b> <b>OKS 571*</b>	PTFE Bonded Coating		<ul style="list-style-type: none"> <li>Dry lubrication of sliding surfaces of different materials at low pressures, low speeds and in dusty environments</li> <li>Prevents tribocorrosion</li> <li>Dries at room temperature</li> <li>No-soiling sliding and parting film</li> <li>Verifiable with UV indicator</li> </ul>		whitish PTFE UV indicator	lower operating temperature: -180 °C upper operating temperature: 260 °C press-fit test (µ): 0,07, no chatter thread friction coefficient (µ total): 0.1 (M10: 8.8/10 black-oxide)	500 ml Can 5 l Hobbock 25 l Hobbock 400 ml Spray*
<b>OKS 575</b>	PTFE Water Bonded Coating		<ul style="list-style-type: none"> <li>For sliding surfaces made of different materials at low pressures, low speeds and in dusty environments</li> <li>Avoids squeaking at differently hard materials</li> <li>Dries at room temperature</li> <li>Verifiable with UV indicator</li> <li>Can be diluted with water</li> </ul>		whitish PTFE UV indicator	lower operating temperature: -180 °C upper operating temperature: 250 °C	5 kg Canister



**Dry lubricants**

**Dry lubricants**

Product	Designation	Fields of Application	Purpose	Properties / Approvals	Main Components	Technical Data	Packaging
<b>OKS 589</b>	<b>MoS<sub>2</sub> PTFE Bonded Coating, thermosetting</b>		<ul style="list-style-type: none"> <li>• Dry lubrication of sliding surfaces under heavy loads and low speeds</li> <li>• Prevents friction and wear</li> <li>• No adhesion of dust and dirt</li> <li>• Use in a broad temperature range</li> </ul>		matt black PTFE graphite MoS <sub>2</sub>	lower operating temperature: -70 °C upper operating temperature: 250 °C press-fit test (μ): 0,07, no chatter thread friction coefficient (μ total): 0.08 (M10: 8.8/10 black-oxide)	5 kg Hobbock 25 kg Hobbock
<b>OKS 1300</b> <b>OKS 1301*</b>	<b>Sliding Film, colourless</b>		<ul style="list-style-type: none"> <li>• Thread coating</li> <li>• Sliding film for plastic, wood and metal</li> <li>• Dry sliding film fast to handling</li> <li>• Verifiable with UV indicator (OKS 1300)</li> <li>• Prevents seizing</li> <li>• For all screw materials</li> <li>• Broad range of uses, in particular for precoating small and mass-produced parts</li> </ul>		colourless silicone wax UV indicator (OKS 1300)	lower operating temperature: -60 °C upper operating temperature: 100 °C thread friction coefficient (μ total): 0.08-0.1 (M10: 8.8/10 black-oxide)	5 l Canister 25 l Canister 200 l Drum 400 ml Spray*
<b>OKS 1710</b>	<b>Sliding Film for Screws, water-based concentrate</b>		<ul style="list-style-type: none"> <li>• Thread coating, also for galvanic surfaces and VA screws, for controlled assembly</li> <li>• Dry sliding film fast to handling</li> <li>• Verifiable with UV indicator</li> <li>• Can be diluted with water in a ratio of up to 1:5</li> <li>• Economic precoating</li> </ul>		milky-white synthetic wax UV indicator	upper operating temperature: 60 °C thread friction coefficient (μ total): 0.08-0.14 (M10: 8.8/10 black-oxide)	5 l Canister 25 l Canister 200 l Drum
<b>OKS 1750</b>	<b>Sliding Film for Wood Screws, water based concentrate</b>		<ul style="list-style-type: none"> <li>• Coating of threads with galvanised surfaces</li> <li>• Dry sliding film fast to handling</li> <li>• Verifiable with UV indicator</li> <li>• Can be diluted with water in a ratio of up to 1:5</li> <li>• In particular for chipboard screws</li> </ul>		yellowish synthetic wax UV indicator	upper operating temperature: 70 °C thread friction coefficient (μ total): 0.08-0.14 (M10: 8.8/10 black-oxide)	25 l Canister
<b>OKS 1765</b>	<b>Sliding Film for thread-forming Screws, water-based concentrate</b>		<ul style="list-style-type: none"> <li>• Coating of thread-cutting screws made of high-alloy steels, galvanised and austenitic steels</li> <li>• Dry sliding film fast to handling</li> <li>• Prevents cold welding</li> <li>• Can be diluted with water in a ratio of up to 1:5</li> </ul>		milky-white synthetic wax corrosion protection	upper operating temperature: 70 °C thread friction coefficient (μ total): 0.06-0.15 (M10: 8.8/10 black-oxide)	5 l Canister 25 l Canister













**Corrosion protection**

**Corrosion protection**

Product	Designation	Fields of Application	Purpose	Properties / Approvals	Main Components	Technical Data	Packaging
<b>OKS 2100</b> <b>OKS 2101*</b>	Protective Film for Metals		<ul style="list-style-type: none"> <li>• Temporary wax-based corrosion protection film for storage and shipping of machine parts with bare metal surfaces</li> <li>• Suitable for all climatic zones</li> <li>• Non-tacky, transparent film</li> <li>• Easy to remove</li> <li>• Good compatibility with lubricants</li> </ul>	<p>OKS 2100: NSF H2 Reg. No. 142256</p>	light-coloured synthetic wax corrosion protection	lower operating temperature: -40 °C upper operating temperature: 70 °C salt spray test: > 1,000 h (layer thickness 50 µm) optimal layer thickness: 50 µm (DIN 50 982-2)	5 l Canister 25 l Canister 200 l Drum 400 ml Spray*
<b>OKS 2200</b>	Water-based corrosion protection, VOC-free		<ul style="list-style-type: none"> <li>• Temporary corrosion protection for all bare metal surfaces under environmental influences such as humidity, moisture, salty atmosphere or industrial atmospheres</li> <li>• Environmentally friendly VOC-free product based on water</li> <li>• Can be removed easily with warm water and water-based cleaners, such as OKS 2650</li> <li>• For use at storage and transportation of metal semi-finished products, spare parts, forms and machines</li> </ul>		light-coloured synthetic wax corrosion protection	lower operating temperature: -40 °C upper operating temperature: 70 °C salt spray test: > 1,000 h (layer thickness > 30 µm) optimal layer thickness: > 30 µm	1 l Bottle 5 l Canister 25 l Canister
<b>OKS 2300</b> <b>OKS 2301*</b>	Mould Protector, Fluid		<ul style="list-style-type: none"> <li>• Temporary corrosion protection film for bare metal surfaces</li> <li>• Green colouration for checking</li> <li>• Suitable for all climatic zones</li> <li>• Displaces water</li> <li>• Easy to remove</li> <li>• Good compatibility with lubricants</li> <li>• For use at storage and dispatch of machine parts</li> </ul>		greenish synthetic wax corrosion protection	lower operating temperature: -40 °C upper operating temperature: 70 °C salt spray test: > 1,000 h (layer thickness 50 µm) optimal layer thickness: > 10 µm (DIN 50 982-2)	5 l Canister 25 l Canister 200 l Drum 400 ml Spray*
<b>OKS 2511</b>	Zinc Coating, spray		<ul style="list-style-type: none"> <li>• Cathodic corrosion protection based on highly pure zinc powder for ferrous metals</li> <li>• For touching up galvanised surfaces</li> <li>• Also suitable as adhesive primer for coating systems</li> <li>• Fast-drying</li> <li>• For use in steel construction work in air conditioning technology</li> </ul>		zinc grey zinc (98.5% pure)	upper operating temperature: 400 °C salt spray test: 700 h (layer thickness > 70 µm) optimal layer thickness: 60-80 µm (DIN 50 982-2)	400 ml Spray
<b>OKS 2521</b>	Gloss Zinc, spray		<ul style="list-style-type: none"> <li>• Decorative corrosion protection based on zinc and aluminium powder for ferrous metals</li> <li>• For touching up hot-galvanised surfaces</li> <li>• Can be welded through</li> <li>• Abrasion resistant</li> <li>• Can be painted over</li> <li>• Fast-drying</li> </ul>		aluminium-coloured purest zinc powder purest aluminium powder	upper operating temperature: 250 °C salt spray test: 240 h (layer thickness 80-100 µm) optimal layer thickness: 30-40 µm (DIN 50 982-2)	400 ml Spray
<b>OKS 2531</b>	Alu-Metallic, Spray		<ul style="list-style-type: none"> <li>• Decorative corrosion protection based on aluminium powder for metals and other solid materials</li> <li>• For touching up hot-galvanised surfaces</li> <li>• Fast-drying</li> <li>• Abrasion resistant</li> <li>• Protects vehicle exhaust systems</li> </ul>		aluminium-coloured	lower operating temperature: -20 °C upper operating temperature: 250 °C salt spray test: > 600 h (layer thickness approx. 50 µm)	400 ml Spray

**Further maintenance products**






**Further maintenance products**

Product	Designation	Fields of Application	Purpose	Properties / Approvals	Main Components	Technical Data	Packaging
<b>OKS 611</b>	Rust Remover with MoS <sub>2</sub> , Spray		<ul style="list-style-type: none"> <li>For destruction-free dismantling of seized or rusted-in machine elements</li> <li>Excellent creep properties</li> <li>Displaces moisture</li> <li>Good sliding properties through MoS<sub>2</sub></li> <li>Universal rust dissolver for industry, workshop and maintenance applications</li> </ul>		green-black MoS <sub>2</sub> mineral oil	lower operating temperature: -30 °C upper operating temperature: 60 °C / 150 °C (with solvent / after evaporation of the solvent) density (at 20 °C): 0.69 g/cm <sup>3</sup> viscosity at (40 °C): > 3 mm <sup>2</sup> /s (with solvent)	400 ml Spray
<b>OKS 621</b>	Rust remover		<ul style="list-style-type: none"> <li>Destruction-free dismantling of seized or rusted-in machine elements</li> <li>Breaks open corrosion layers by cooling down to -40 °C</li> <li>Penetration of creep oil into microsize cracks</li> <li>Fast-acting rust dissolver for industry, workshop and maintenance applications</li> </ul>		light-coloured solvent mineral oil	lower operating temperature: -10 °C upper operating temperature: 40 °C	400 ml Spray
<b>OKS 661</b>	Rust Away		<ul style="list-style-type: none"> <li>Ideal for loosening rusted connections. For removing flash rust and rust stains</li> <li>Rust layer actively broken down through chemical reaction</li> <li>Harmless to the environment thanks to environmentally friendly ingredients</li> <li>Does not contain petrol or mineral oil</li> </ul>		colourless-light yellow solvent	base oil: solvent colour: colourless-light yellow	250 ml Spray
<b>New</b>							
<b>OKS 1360</b> <b>OKS 1361*</b>	Silicone Release Agent		<ul style="list-style-type: none"> <li>Parting agent and lubricant for use in processing plastics</li> <li>Chemically neutral</li> <li>Solvent-free</li> <li>Displaces water</li> <li>Fitting aid for rubber profiles</li> <li>Lubrication of cutting edges</li> <li>Care and impregnation of plastic surfaces and textiles (OKS 1361)</li> </ul>	  OKS 1361: NSF H1 Reg. No. 129481	colourless polydimethylsiloxane	lower operating temperature: -60 °C upper operating temperature: 200 °C	1 l Bottle 5 l Canister 25 l Canister 400 ml Spray*
<b>OKS 1510</b> <b>OKS 1511*</b>	Release Agent, silicone free		<ul style="list-style-type: none"> <li>Silicone-free parting agent for arc and inert-gas arc welding</li> <li>No burning on of weld spatters</li> <li>Increases torch service life</li> <li>Highly-effective mould release agent for processing plastics</li> <li>Universal solvent-based welding spray</li> </ul>		vegetable base oil	density (at 20 °C): 1 g/cm <sup>3</sup>	5 l Canister 25 l Canister 400 ml Spray*
<b>OKS 1600</b> <b>OKS 1601*</b>	Spatter Release, water-based concentrate		<ul style="list-style-type: none"> <li>Environmentally friendly, water-based parting agent for arc and inert-gas arc welding</li> <li>No burning on of weld spatters</li> <li>Increases torch service life</li> <li>Can be removed residue-free</li> <li>Universal, silicone-free, welding parting-agent concentrate</li> </ul>		whitish-transparent natural greasy oil water	density (at 20 °C): 0.98 g/cm <sup>3</sup>	5 l Canister 25 l Canister 400 ml Spray*
<b>OKS 2711</b>	Refrigerating Spray		<ul style="list-style-type: none"> <li>Rapid undercooling of smaller surfaces and parts down to -45 °C</li> <li>Simulation of cold-start conditions on motor vehicle engines</li> <li>For locating thermally-related interruptions</li> <li>Protects adjacent areas during soldering and welding</li> <li>Easier mounting with interference fits</li> </ul>		colourless solvent mixture	base oil: solvent mixture colour: colourless	400 ml Spray
<b>OKS 2731</b>	Compressed-Air Spray		<ul style="list-style-type: none"> <li>Removal of loose dirt particles at inaccessible points</li> <li>Dry, oil-free pressurised gas mixture</li> <li>Evaporates quickly and residue-free</li> <li>For maintenance work in electronics and precision mechanics, on optical devices and all types of office machines</li> </ul>		colourless solvent mixture		400 ml Spray



**Further maintenance products**

**Further maintenance products**












Product	Designation	Fields of Application	Purpose	Properties / Approvals	Main Components	Technical Data	Packaging
<b>OKS 2800</b> <b>OKS 2801*</b>	Leak Detector		<ul style="list-style-type: none"> <li>• Location of leaks on pressurised lines, fittings and containers</li> <li>• Formation of bubbles indicates loss of gas</li> <li>• For use on pneumatic, oxygen and gas systems as well as refrigerating machines</li> </ul>	  OKS 2801: DVGW approval Reg.-Nr. NG-5170AO0659	transparent active ingredients corrosion protection	upper operating temperature: 50 °C	5 l Canister 25 l Canister 400 ml Spray*
<b>OKS 2811</b>	Leak Detector, frost-proof		<ul style="list-style-type: none"> <li>• Location of leaks on pressurised lines, fittings and containers down to -15 °C</li> <li>• Formation of bubbles indicates loss of gas</li> <li>• For use on pneumatic, oxygen and gas systems as well as refrigerating machines</li> </ul>	  OKS 2811: DVGW approval Reg.-Nr. DG-5170CN0340	colourless active ingredients corrosion protection	lower operating temperature: -15 °C upper operating temperature: 50 °C	400 ml Spray
<b>OKS 2901</b>	Belt Tuning, Spray		<ul style="list-style-type: none"> <li>• Increases belt tension force</li> <li>• Prevents slip</li> <li>• Protects belt against drying out and wearing</li> <li>• Increases service life</li> <li>• Prevents squeaking</li> <li>• For universal use on all V-belts, round and flat belts</li> </ul>		yellowish adhesive oil	upper operating temperature: 80 °C	400 ml Spray



## CLEANERS FOR THOROUGH REMOVAL OF SOILING AND LUBRICANT RESIDUES

### Cleaners

### Cleaners

Product	Designation	Fields of Application	Purpose	Properties / Approvals	Main Components	Technical Data	Packaging
<b>OKS 2610</b> <b>OKS 2611*</b>	Universal Cleaner		<ul style="list-style-type: none"> <li>For machine parts and surfaces with oily or greasy soiling</li> <li>Evaporates quickly and residue-free</li> <li>High cleaning power</li> <li>Cleaner for lubrication and glueing points</li> </ul>		colourless	density (at 20 °C): 0.75 g/cm <sup>3</sup> viscosity at (40 °C): < 0.76 mm <sup>2</sup> /s	5 l Canister 25 l Canister 200 l Drum 500 ml Spray*
<b>OKS 2621</b>	Contact Cleaner, Spray		<ul style="list-style-type: none"> <li>To remove soiling that can cause creepage currents</li> <li>No running thanks to fast evaporation</li> <li>For example, for cleaning distribution boards, switches, relays, potentiometers, plug-in connections, sliding and screw contacts</li> </ul>		colourless aliphatic hydrocarbons	density (at 20 °C): 0.66 g/cm <sup>3</sup>	400 ml Spray
<b>OKS 2631</b>	Multi-Foam Cleaner, Spray		<ul style="list-style-type: none"> <li>Removes firmly adhering organic soiling such as nicotine, fat and silicone films</li> <li>Cleans metals, plastics, glass and rubber in the gastronomy, office and vehicle fields gently and without leaving stripes</li> <li>Ideally suitable for vertical surfaces</li> </ul>	stress crack test DIN EN ISO 22088-3 passed	slightly bluish additives anionic surfactants	density (at 20 °C): 0.92 g/cm <sup>3</sup>	400 ml Spray
<b>OKS 2650</b>	Industrial cleaner		<ul style="list-style-type: none"> <li>Aqueous cleaner for removing heavy oily, greasy and sooty soiling</li> <li>Biodegradable</li> <li>Good separation behaviour</li> <li>Gentle to delicate surfaces</li> <li>For universal use in industry, workshop and food processing technology</li> <li>No classification marks according to (EG) No. 1272/2008</li> </ul>	  biodegradability: OECD 301 B: 1992-07 86 % OKS 2650: NSF A1 Reg. No. 129003	red silicates non-ionic surfactants	density (at 20 °C): 1.04 g/cm <sup>3</sup> pH value: 10.7 (concentrate)	500 ml Pump sprayer 1 l Bottle 5 l Canister 25 l Canister 200 l Drum 1000 l container
<b>OKS 2660</b> <b>OKS 2661*</b>	Fast Cleaner		<ul style="list-style-type: none"> <li>For machine parts and surfaces with oily or greasy soiling</li> <li>Evaporates quickly and residue-free</li> <li>High cleaning power</li> <li>Ideal for preparation of bonded connections and cleaning of lubricating points</li> <li>Brake cleaner</li> </ul>		colourless	density (at 20 °C): 0.725 g/cm <sup>3</sup>	25 l Canister 56 l Drum 600 ml Spray*
<b>OKS 2670</b> <b>OKS 2671*</b>	Intensive Cleaner for the Food Processing Industry		<ul style="list-style-type: none"> <li>For removing aged and gummy oil and grease residues</li> <li>For dissolving silicone and adhesive residues</li> <li>Evaporates quickly and residue-free</li> <li>High cleaning action</li> <li>Good compatibility to common plastics</li> <li>For use in the food processing, livestock feed and pharmaceutical industries</li> </ul>	  OKS 2670: NSF K1, K3 Reg.- Nr. 149997 OKS 2671: NSF K1, K3 Reg. No. 149998	colourless	density (at 20 °C): 0.78 g/cm <sup>3</sup>	5 l Canister 25 l Canister 400 ml Spray*
<b>OKS 2681</b>	Adhesive and Paint Remover, Spray		<ul style="list-style-type: none"> <li>For the removal of stubborn impurities, such as residues of sealants, paints and adhesives, bitumen and tar splashes</li> <li>Can be used on metal, stainless steel, glass, wood and ceramics</li> <li>Can be washed off well with water after use</li> <li>Low effect on climate</li> <li>For use in industry, workshops and trade</li> </ul>		colourless	density (at 20 °C): 0.85 g/cm <sup>3</sup>	400 ml Spray

## LUBRICATING DEVICES FOR PRACTICAL USE

### Solutions for continuous use in industry

#### Lever grease gun

The practical grease gun for reliable, economical application of greases. Thanks to its well thought-out design and rugged construction, it stands up under even the toughest conditions. Available separately or in the Lubricating Set (20 cartridges of OKS 400 including a lever grease gun).



#### Adapter set for Reiner lever grease gun

The adapter set for the Reiner lever grease gun system for rapid and simple conversion to 400 ml DIN cartridges. Thanks to its simple mounting, all OKS product cartridges can be used with the Reiner lever grease gun without much additional effort or high additional costs.

Available as a set with 10 adapters each with threads and cartridge covers, a reducing ring and mounting instructions.



## OKS AIRSPRAY SYSTEM

### OKS Airspray system

The economic alternative to the spray can. The pressure spray system consists of the Airspray can and a unit for filling the can with OKS products, such as oils & cleaning agents, and compressed air as a harmless propellant gas.

#### Avoiding waste and reducing costs

The OKS Airspray system prevents waste and reduces costs. Disposal costs which would arise if spray cans were used are reduced. A small investment in environmental protection that quickly pays off.

#### Proven and affordable

Whether it's in the workshop or in industrial maintenance, the Airspray system has proven to be the trouble-free and inexpensive alternative to the spray can for over 10 years.



### System components

#### Filling station for use in workshops

The filling station allows for easy filling of the Airspray can with compressed air. It's suitable for fixed mounting, for example near the product location or at the workplace.



How it works: Fill the product into the Airspray can, insert the rising tube with adapter, place the valve with spray head onto the adapter and screw hand-tight with the union nut. Place the can with the valve on the filling station and press down for approx. 2 sec. Ready to spray.

#### Automatic filling unit for industrial users

The automatic filling unit allows filling of the Airspray can with product and compressed air in a single step.

How it works: The automatic filling unit is connected to the product container through the suction line. Then the Airspray can is pressed into the "Active substance-air tapping point" (red) for filling. The can can be filled or refilled with compressed air through the additional "Air tapping point" (black).



#### Airspray spray sets

Two **spray sets** (standard products/cleaners) are available for perfect usage of the Airspray can with suitable OKS products. These spray sets include three different spray heads and a suitable valve. The spray heads differ in their spray pattern and spray rate and can thus be selected flexibly to ideally suit the respective application conditions. The spray heads are fitted with Viton seals to achieve high application stability.

For clear assignment of the filled Airspray can to the OKS product being used, corresponding labels have been provided for download from [www.oks-germany.com](http://www.oks-germany.com). The blank label templates required for printing are enclosed with the spray set.

#### Drain cocks

Reusable drain cocks for filling into the Airspray can without dripping or leaking, suitable for all 5 l and 25 l OKS plastic canisters.

#### Products

OKS products approved for the Airspray system are indicated with this pictogram in the catalogue.



The OKS Airspray system on YouTube.




## LUBRICANT SOLUTIONS FOR CRITICAL APPLICATION CONDITIONS

### OKS experts stand for innovative ideas and product concepts

**Movement without friction is a dream of mankind. But friction still remains a fact of life. To ensure “frictionless” running of your machines, OKS can provide a lubricant solution for almost any application. Whether the lubrication of roller bearings, chains or slideways, under extreme conditions of use or under the influence of aggressive media – with lubricants from OKS you solve your tribological problems safely and reliably.**

#### Extreme conditions of use

Ever more productive machines, combined with extended operating lives push materials and machine elements to their stress limits. OKS offers lubricants that unfold their full performance even under these conditions. Various OKS speciality lubricants resist extreme temperatures, high temperature fluctuations or high pressures.



#### Plastic lubrication

New design developments mean that friction pairs are increasingly being used that place particular requirements of the compatibility of the lubricants. Special alloys or ceramic elements are used. Material combinations of plastic/metal and plastic/plastic are increasingly also being used. OKS provides lubricants that are compatible with many materials.



#### Lubrication under the influence of aggressive media

Whether in permanent use with contact to acids or lyes at columns, boilers or pipings in process engineering industries, at corrosive influences, at outdoor weathering or under the influence of salt water, your plants remain completely operational also under these conditions thanks to OKS speciality lubricants.



#### Speciality lubricants for food processing technology

OKS develops a wide range of speciality lubricants especially for the high hygiene requirements of food processing technology.



## WHAT YOU CAN EXPECT FROM OKS – PERFORMANCE THAT MOVES

### Maximum product quality, active occupational health and safety and consistent environmental protection

**These three factors form the major factors for the sustainable success of our company and our industrial and commercial customers worldwide.**

OKS is oriented towards the development, production and sales of lubricants, maintenance and corrosion protection products of the highest possible quality. Our focus lies on customers who are satisfied with our products and our performance.

All employees are committed to the high quality, environmental protection and work protection demands. Continuous personnel development results in active participation in implementing the corresponding targets.

Our high quality and environmental standards are already ingrained in our product development. Environmental protection and the user's safety have the greatest priority for us. Not only through our environmentally conscious company management, but in particular through the development of state-of-the-art lubricants do we contribute to a marked reduction of the negative environmental impact caused by technical factors.

We utilise modern production processes in manufacturing our products. In safe and environmentally friendly production processes we keep the effect on man and environment as small as possible.

In cooperation with our local sales partners we place great emphasis on qualification and thus ensure excellent consulting services and competence in solving problems locally.

Our participation in the initiative “We all take care”, an initiative of the Freudenberg Group for environmental and work protection and for the reduction of occupational accidents, is further proof that our goals are corporate practice.

The high OKS quality standard is proven by our certification by the TÜV SÜD Management Service GmbH in the fields of quality (ISO 9001:2015), environment (ISO 14001:2015) and work protection (ISO 45001:2018)



[www.tuev-sued.de/ms-zert](http://www.tuev-sued.de/ms-zert)

## Our responsibility – Sustainable business for our customers and the environment

Our sustainability concept is based on the sustainability strategy of the Freudenberg Group. With its values and principles, it defines sustainability as a key pillar of our corporate culture and an integral part of our economic and social environment.

### Responsibility

We source the basic and raw materials for our products from all over the world and deliver our products to every corner of the globe, too. This is why we believe our responsibility stretches far beyond the immediate vicinity of our company headquarters in Maisach, Germany. We consistently apply our own code of conduct and a dedicated supplier selection system with clear requirements for ethical and regulatory conformity. We see compliance with our industry's regulatory requirements as a binding obligation, just like our basic ethical principles.

### Safety

Safety lies at the heart of our process design and product development. Ensuring the safety of people is always our foremost concern, regardless of whether they work for OKS or with OKS products.

However, our understanding of safety also includes potential environmental impacts which arise during the creation or use of our products.

### Improvement

We set clear goals for better sustainability. We define parameters and measure them regularly to record improvements and, where necessary, work even more intensely on making things better.

### Value chain

We always contemplate our entire value chain to improve processes that contribute to issues such as resource conservation or environmental sustainability. The same applies to the users of our products. We help them to achieve their own sustainability goals, for instance through:

- Energy saving and emissions reduction
- Resource efficiency and optimisation of maintenance cycles
- Reduction of consumption and waste quantities

### Footprint and handprint

Our aim is to minimise any potentially negative impact of our actions, in other words, the direct effects of our business activity on the environment and society.

This is how we define our **footprint**.

We support our customers and the users of our products with regard to their own sustainable actions. We help them to produce more efficiently and reduce negative effects on the environment.

This is what we call our **handprint**.

One major goal we're pursuing is reducing the CO<sub>2</sub> footprint and handprint of our products.



OKS sustainability report  
available for download:



## High-efficiency lubricants for a sustainable handprint

Reduced resource usage is not only positive for our own footprint, but for that of our customers as well. A user who can use products on a renewable basis reduces their ecological footprint and can also worry less about the disposal of used lubricants.

When we offer modern lubricants whose range of performance is far above that of conventional lubricants, it not only reduces the amount of lubricant used, but also comes along with tangible economical benefits for the user:

- **High energy efficiency**
- **A longer operating period**
- **Less machine downtime**
- **Reduced maintenance expenditure**

### Handprint example

#### Pinpoint chain lubrication with high-performance lube oil

High-efficiency chain oils not only ensure less wear and reliable chain function, but also reduce friction between chain links. This reduces the bearing pressure of the chain and leads to a reduction in the associated emissions, depending on the type of energy used.



### Sustainability at OKS at a glance

#### Improve footprint

through sustainable management of the value creation chain

#### Further develop our handprint

for the benefit of our customers

#### Use resources efficiently

through the reduced usage of resources and the utilisation of renewable raw materials

#### Avoid critical raw materials

to ensure a non-critical work environment

#### Promote safety

for the environment, users and our employees

#### Define (measure) parameters

to check and continually improve our footprint and handprint



Over 165 high-performance products  
from one supplier

www.oks-germany.com



- **Pastes** for easy assembly and dismantling
- **Oils** with high-performance additives for reliable lubrication
- **Greases** for long-term lubrication under critical operation conditions
- **Dry lubricants** – the alternative for special application cases
- **Corrosion protection** for reliable preservation during storage and shipping
- **Maintenance products** for ongoing service
- **Cleaners** for thorough removal of soiling and lubricant residues

For your company's individual lubrication requirements please contact OKS.

Follow us on

LinkedIn



## CONSULTING AND SALES

The information in this publication reflect state-of-the-art technology, as well as extensive testing and experience. Due to the diversity of possible applications and technical realities, they can only serve as recommendations and are not arbitrarily transferable. Therefore, no obligations, liability or warranty claims can be derived from them. We only accept liability for the suitability of our products for particular purposes, and for certain properties of our products, in the event that we have accepted such liability in writing in the individual case. Any case of justified warranty claims shall be limited to the delivery of replacement goods free of defects or, in the event that this subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular the liability for consequential injuries or damage, shall always be excluded. Prior to use, the customer must conduct its own testing to prove suitability. No liability accepted for spelling mistakes, typing errors, miscalculations and translation errors. The data are subject to change for the sake of progress.

® = registered trademark

**OKS Spezialschmierstoffe GmbH**

Ganghoferstr. 47

82216 Maisach

GERMANY

Phone +49 8142 3051-500

info@oks-germany.com

a brand of  
 **FREUDENBERG**

For a world in motion