


OKS 387

High-Temperature Chain Lubricant for the Food Industry

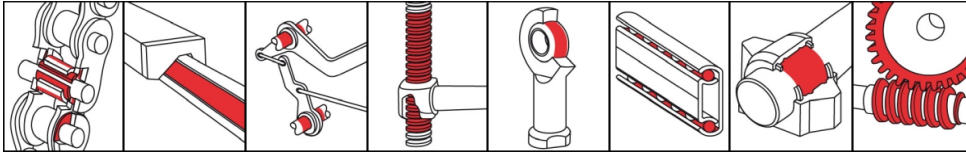

Description

OKS 387 is a high-temperature chain lubricant with graphite for strongly loaded lubrication points at extreme temperatures.

Applications

- Lubrication of highly stressed chains, joints or slideways at higher temperatures
- For conveying systems running beneath radiated heat, in baking and drying lines in the foodstuffs industry
- Dry lubrication at operating temperatures above 200°C
- The synthetic oil content evaporates odorlessly without leaving residues, while the solid lubricant content are left behind to carry out dry lubrication

Branches

- Catering equipment and food processing technology
- Glass and foundry industry
- Iron and steel industry
- Logistics
- Rubber and plastic processing
- Rail vehicle technology
- Shipbuilding and marine technology
- Chemical industry
- Municipal services
- Paper and packaging industry
- Plant and machine (tool) engineering

Advantages and benefits

- Highly suitable as a high-temperature lubricant
- Highly effective due to homogeneous distribution of the finest graphite throughout the oil
- Versatile application as a liquid lubricant under high temperature conditions
- Resistant to water, chemicals, fuels, lubricants, and hydraulic oils
- NSF H1 registered
- MOSH/MOAH-free (as per recipe)

Application tips

For best results, clean the surfaces. Best way is to clean mechanically first and then with OKS 2610 or OKS 2611 universal cleaner. With a brush, drip oiler or by immersion or using a suitable automatic lubrication system, apply a sufficient quantity to the locations to be lubricated. If at all possible, avoid excess. The manufacturer's instructions should be observed. Assess the lubrication frequency and quantity on basis of service conditions. Only mix with suitable lubricants.

Packaging

- 5 l Canister
- 25 l Canister

OKS 387

High-Temperature Chain Lubricant for the Food Industry

Technical data

| | Standard | Conditions | Unit | Value |
|-------------------------------------------|-----------------|--------------------|--------|-----------------------------------------|
| Main components | | | | |
| base oil | | | | polyglycol |
| solid lubricants | | | | graphite |
| Application related technical data | | | | |
| viscosity at (40°C) | DIN 51 562-1 | | mm²/s | 170 |
| viscosity at (100°C) | DIN 51 562-1 | | mm²/s | 36.6 |
| viscosity index | DIN ISO 2909 | | | 265 |
| viscosity class | DIN ISO 3448 | DIN 51 562-1, 40°C | ISO VG | 220 |
| flashing point | DIN ISO 2592 | > 79 | °C | 240 |
| upper operating temperature | | liquid lubrication | °C | 150 |
| maximal operating temperature | | dry lubrication | °C | 600 |
| colour | | | | black |
| density (at 20°C) | DIN EN ISO 3838 | | g/cm³ | 1.04 |
| four-ball test rig welding load | DIN 51 350-2 | | N | 2,800 |
| four-ball test rig wear | DIN 51 350-3 | | mm | 3.8 |
| Properties and approvals | | | | |
| approval for food processing technology | | | | NSF H1, Reg.-Nr. 126583 |

OKS Spezialschmierstoffe GmbH

Ganghoferstraße 47

82216 Maisach

+49 8142 3051 - 500

info@oks-germany.com

www.oks-germany.com

a brand of
 **FREUDENBERG**

The information in this publication reflects state-of-the-art technology, as well as extensive testing and experience. Due to the diversity of possible applications and technical realities, they can only serve as recommendations and are not arbitrarily transferable. Therefore, no obligations, liability or warranty claims can be derived from them. We only accept liability for the suitability of our products for particular purposes, and for certain properties of our products, in the event that we have accepted such liability in writing in the individual case. Any case of justified warranty claims shall be limited to the delivery of replacement goods free of defects, in the event that this subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular the liability for consequential injuries or damage, shall always be excluded. Prior to use, the customer must conduct its own testing to prove suitability. The data are subject to change for the sake of progress. ® = Registered trademark
Product restricted to professional users. Safety data sheet available for download at [www.oks-germany.com](#)
Our Customer and Technical service will be pleased to help should you have any further questions.