


# OKS 230

## MoS<sub>2</sub> High-Temperature Paste

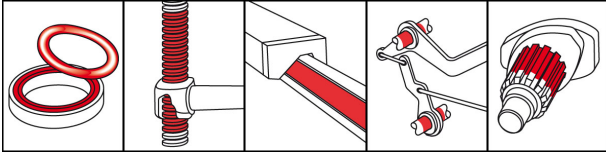

### Description

OKS 230 is a high-temperature paste with MoS<sub>2</sub>.

### Applications

- Lubrication of temperature-stressed machine parts, e.g. rolling bearings, friction bearings, slideways, chains, rollers or moving parts in hot forming, heat treatment or drying
- Dry lubrication, e.g. of kiln and rack-truck bearings, bearings of pouring ladles, converters or hot-air blowers at temperatures over 250°C
- Lubrication of plastic and rubber at normal temperature when the materials concerned are not resistant to mineral oil

### Advantages and benefits

- Highly effective due to the strong affinity of the MoS<sub>2</sub> for metals
- Extremely low friction at highest loading capability
- Broad range of applications at temperatures up to 200°C as paste, over 200°C to 450°C as dry lubricant
- Resistant to water, fuels and lubricants, chemicals and hydraulic fluids

### Branches

- Plant and machine (tool) engineering
- Paper and packaging industry
- Chemical industry
- Shipbuilding and marine technology
- Rail vehicle technology
- Rubber and plastic processing
- Iron and steel industry
- Glass and foundry industry
- Logistics
- Municipal services

### Application tips

For best adhesion, clean the threads and sliding surfaces from dirt and other lubricants. Best way is to clean mechanically first and then with OKS 2610 or OKS 2611 universal cleaner. Apply paste evenly thin onto the sliding areas with brush, spatula, etc. Remove excessing paste. When used for rolling bearings, dab paste in small amount with brush on sliding surface and spin the bearing several times. In operation, relubricate with OKS 310 MoS<sub>2</sub> High-temperature lubricant. Do not use paste instead of grease and only mix with appropriate lubricants.

### Packaging

- 250 g Can
- 1 kg Can
- 5 kg Hobbock
- 25 kg Hobbock



# OKS 230

## MoS<sub>2</sub> High-Temperature Paste

### Technical Data

	Standard	Conditions	Unit	Value
<b>Main components</b>				
base oil				polyglycol
thickener				lithium hydroxystearate
solid lubricants				MoS <sub>2</sub>
solid lubricants				other solid lubricants
<b>Application related technical data</b>				
flashing point	DIN EN 22 719	> 79	°C	270
drop point	DIN ISO 2176		°C	> 180
unworked penetration	DIN ISO 2137	no shear stress	0.1 mm	250-280
lower operating temperature			°C	-35
upper operating temperature		lubrication	°C	180
upper operating temperature		separation	°C	450
colour				black
density (at 20°C)	DIN EN ISO 3838		g/cm <sup>3</sup>	1.75
four-ball test rig welding load	DIN 51 350-4		N	3,200
thread friction coefficient (μ total)	DIN EN ISO 16 047	screw ISO 4017 M10x55-8.8 black-oxide, nut ISO 4032 M10-10 black-oxide		0.1
breakaway torque	DIN 267-27	M10 A2, 40 Nm, 400°C, 100h	Nm	< 1.2 x tightening torque
press-fit test	draft DIN 51 833		μ	0.11

### OKS Spezialschmierstoffe GmbH

Ganghoferstraße 47  
 82216 Maisach  
 Phone: +49 (0) 8142 3051 - 500  
 info@oks-germany.com  
 www.oks-germany.com



The information in this publication reflects state-of-the-art technology, as well as extensive testing and experience. Due to the diversity of possible applications and technical realities, they can only serve as recommendations and are not arbitrarily transferable. Therefore, no obligations, liability or warranty claims can be derived from them. We only accept liability for the suitability of our products for particular purposes, and for certain properties of our products, in the event that we have accepted such liability in writing in the individual case. Any case of justified warranty claims shall be limited to the delivery of replacement goods free of defects, in the event that this subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular the liability for consequential injuries or damage, shall always be excluded. Prior to use, the customer must conduct its own testing to prove suitability. The data are subject to change for the sake of progress. ® = Registered trademark  
**Safety data sheet** for industrial and commercial users is available for downloading under [www.oks-germany.com](http://www.oks-germany.com). Our Customer and Technical service will be pleased to help should you have any further questions.