



# OKS 240

## Copper Paste

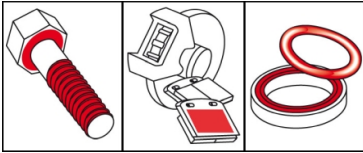

### Description

High-temperature screw paste on copper basis for preventing corrosion, seizing and binding.

### Applications

- Assembling screw threaded connections subjected to high temperatures and corrosive influences
- Screwed connections at pipe fittings, flange joints and fittings in superheated steam lines
- Combustion chamber screwed connections and mounting bolts of gas and oil burners
- Screwed connections at combustion engines, exhaust systems, silencers and exhaust gas pipe connections

### Advantages and benefits

- Allows reliable non-destructive dismantling even after longer operating period under high operating and ambient temperatures
- Provides an optimal ratio of screw pretension and tightening torque
- Electrically conductive
- Also available as spray version OKS 241

### Branches

- Plant and machine (tool) engineering
- Paper and packaging industry
- Municipal services
- Rubber and plastic processing
- Iron and steel industry
- Glass and foundry industry
- Shipbuilding and marine technology
- Logistics
- Rail vehicle technology
- Chemical industry

### Application tips

To achieve optimal adhesion clean the thread or the sliding surface first mechanically and then with OKS 2610/OKS 2611 universal cleaner to remove soiling as well as any lubricant residues. Use a brush, spatula or similar to apply a sufficient amount of paste to the head or nut contact surface and to the thread. Spray on evenly OKS 241 spray. The paste will also act as a sealant. Caution: Do not use paste instead of grease and mix only with suitable lubricants.

### Packaging

- 8 ml Tube
- 75 ml Tube
- 250 g Brush tin
- 1 kg Can
- 5 kg Hobbock
- 25 kg Hobbock

# OKS 240 Copper Paste

## Technical data

|   | Standard          | Conditions   | Unit              | Value                     |
|---|-------------------|--|-------------------|---------------------------|
| <b>Main components</b>                    |                   |  |                   |                           |
| base oil                                  |                   |  |                   | synthetic oil             |
| thickener                                 |                   |  |                   | inorganic                 |
| solid lubricants                          |                   |  |                   | copper                    |
| solid lubricants                          |                   |  |                   | other solid lubricants    |
| solid lubricants                          |                   |  |                   | MoS <sub>2</sub>          |
| <b>Application related technical data</b> |                   |  |                   |                           |
| flashing point                            | DIN ISO 2592      | > 79   | °C                | > 180                     |
| drop point                                | DIN ISO 2176      |  | °C                | without                   |
| unworked penetration                      | DIN ISO 2137      | no shear stress  | 0.1 mm            | 295-340                   |
| lower operating temperature               |                   |  | °C                | -30                       |
| upper operating temperature               |                   | separation   | °C                | 1100                      |
| colour                                    |                   |  |                   | copper-brown              |
| density (at 20°C)                         | DIN EN ISO 3838   |  | g/cm <sup>3</sup> | 1.3                       |
| four-ball test rig welding load           | DIN 51 350-4      |  | N                 | 3,000                     |
| thread friction coefficient (μ total)     | DIN EN ISO 16 047 | screw ISO 4017 M10x55-8.8 black-oxide, nut ISO 4032 M10-10 black-oxide |                   | 0.13                      |
| thread friction coefficient (μ total)     | DIN EN ISO 16 047 | Screw ISO 4017 A2 M10x55-70, Nut ISO 4032 A2 M10-70                    |                   | 0.14                      |
| breakaway torque                          | DIN 267-27        | M10 A2, 40 Nm, 400 °C, 100 h   | Nm                | < 2,5 x tightening torque |

### OKS Spezialschmierstoffe GmbH

Ganghoferstraße 47

82216 Maisach

+49 8142 3051 - 500

info@oks-germany.com

www.oks-germany.com



The information in this publication reflects state-of-the-art technology, as well as extensive testing and experience. Due to the diversity of possible applications and technical realities, they can only serve as recommendations and are not arbitrarily transferable. Therefore, no obligations, liability or warranty claims can be derived from them. We only accept liability for the suitability of our products for particular purposes, and for certain properties of our products, in the event that we have accepted such liability in writing in the individual case. Any case of justified warranty claims shall be limited to the delivery of replacement goods free of defects, in the event that this subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular the liability for consequential injuries or damage, shall always be excluded. Prior to use, the customer must conduct its own testing to prove suitability. The data are subject to change for the sake of progress. ® = Registered trademark  
**Product restricted to professional users.** Safety data sheet available for download at [www.oks-germany.com](http://www.oks-germany.com)  
 Our Customer and Technical service will be pleased to help should you have any further questions.