



OKS 300

MoS₂ Mineral Oil Concentrate

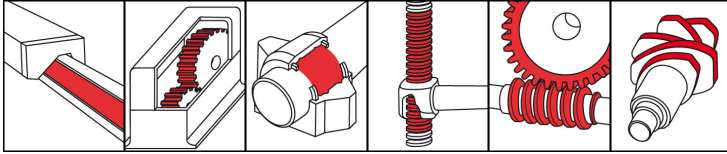

Mo_x - Active

Description

OKS 300 is a MoS₂-Mineral Oil Concentrate, an additive to gear, engine and machine oils.

Applications

- Lubricating oil additive for heavily loaded friction and rolling bearings for increasing the lubricating effect, improving the high-pressure properties and reducing the temperature increase
- Gear oil additive to guard against gearwheel damage Stops pitting and is especially suitable for gearbox designs with a high percentage of sliding
- Engine and compressor oil additive for reduced wear and increased operating safety, as run-in and smoothing lubricant
- Machining oil additive for chip-free or cutting production to increase working speeds and tool life

Advantages and benefits

- Excellently suited as performance-increasing additive, as additive to bed track oils, engine oils, C/CC oils and slightly alloyed industrial oils
- Highly effective due to finest, homogeneous MoS₂ distribution in the oil
- Broad range of uses with many different oils and alone as a high-performance oil
- Lowest friction due to high lubricating effectiveness of MoS₂
- Fully stabilised without precipitation, passes through common micro-filters, does not react to magnetic filters

Branches

- Logistics
- Rubber and plastic processing
- Chemical industry
- Shipbuilding and marine technology
- Plant and machine (tool) engineering
- Rail vehicle technology
- Iron and steel industry
- Glass and foundry industry
- Municipal services
- Paper and packaging industry

Application tips

Shake or stir well before use. Depending on loading, add 1-2% to engine oils and 5-10% to machine- and gear oils. Instructions of the machine manufacturer have to be observed. Mixing will occur in operation. Only mix with appropriate lubricants. Not suitable with water-based lubricants and polyglycol oils.



PRODUCT INFORMATION

OKS 300

MoS₂ Mineral Oil Concentrate

Packaging

- 1 l Bottle
- 5 l Canister
- 25 l Canister
- 200 l Drum

Technical Data

	Standard	Conditions	Unit	Value
Main components				
base oil				mineral oil
solid lubricants				MoS ₂
additives				Mo _x -Active
Application related technical data				
viscosity at (40°C)	DIN 51 562-1		mm ² /s	approx. 90
viscosity class	DIN 51 519	DIN 51 562-1, 40°C	ISO VG class	100
pour point	DIN ISO 3016	3°C step	°C	-30
flashing point	DIN ISO 2592	> 79	°C	230
unworked penetration	DIN ISO 2137	no shear stress	0.1 mm	260-290
colour				black
density (at 20°C)	DIN EN ISO 3838		g/cm ³	0.92
Product specific technical data				
particle size	DIN 51 832		µm	0.3

OKS Spezialschmierstoffe GmbH

Ganghoferstraße 47
82216 Maisach
Phone: +49 (0) 8142 3051 - 500
info@oks-germany.com
www.oks-germany.com



The information in this publication reflects state-of-the-art technology, as well as extensive testing and experience. Due to the diversity of possible applications and technical realities, they can only serve as recommendations and are not arbitrarily transferable. Therefore, no obligations, liability or warranty claims can be derived from them. We only accept liability for the suitability of our products for particular purposes, and for certain properties of our products, in the event that we have accepted such liability in writing in the individual case. Any case of justified warranty claims shall be limited to the delivery of replacement goods free of defects, in the event that this subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular the liability for consequential injuries or damage, shall always be excluded. Prior to use, the customer must conduct its own testing to prove suitability. The data are subject to change for the sake of progress. ® = Registered trademark
Safety data sheet for industrial and commercial users is available for downloading under www.oks-germany.com. Our Customer and Technical service will be pleased to help should you have any further questions.