



## OKS 310

### MoS<sub>2</sub>-High Temperature Lubricating Oil

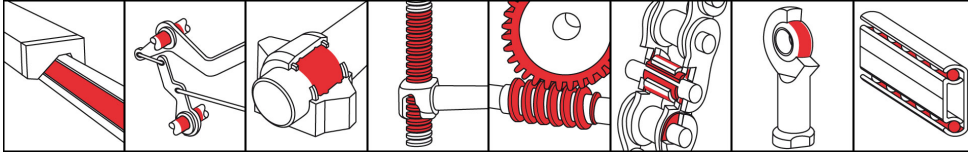

#### Description

OKS 310 is a high-temperature oil with MoS<sub>2</sub> for lubrication of machine elements up to +450°C.

#### Applications

- Lubrication of friction and rolling bearings, chains, joints or slideways at higher temperatures
- For conveying systems under radiation heat in painting, stoving and drying systems, travelling grates in firing systems
- Dry lubrication at temperatures above 200°C
- Lubrication of elastomers and plastics not resistant to mineral oil

#### Advantages and benefits

- Highly suitable as a high-temperature lubricant
- Very effective due to finest, homogeneous MoS<sub>2</sub> distribution in the oil
- Resistant to water and many chemicals, fuels, lubricants and hydraulic oils

#### Branches

- Iron and steel industry
- Shipbuilding and marine technology
- Paper and packaging industry
- Municipal services
- Plant and machine (tool) engineering
- Chemical industry
- Glass and foundry industry
- Rubber and plastic processing
- Rail vehicle technology
- Logistics

#### Application tips

For best adhesion, clean the surfaces. Best way is to clean mechanically first and then with OKS 2610/OKS 2611 universal cleaner. With a brush, drip oiler or by immersion or using a suitable automatic lubrication system, apply a sufficient quantity to the locations to be lubricated. If at all possible, avoid excess. Observe the machine manufacturer's instructions. Assess the lubrication frequency and quantity on basis of service conditions. Only mix with suitable lubricants.



## PRODUCT INFORMATION

# OKS 310

## MoS<sub>2</sub>-High Temperature Lubricating Oil

### Packaging

- 1 l Bottle
- 5 l Canister
- 25 l Canister

### Technical Data

	Standard	Conditions	Unit	Value
<b>Main components</b>				
base oil				polyglycol
solid lubricants				MoS <sub>2</sub>
<b>Application related technical data</b>				
viscosity at (40°C)	DIN 51 562-1		mm <sup>2</sup> /s	108
viscosity class	DIN 51 519	DIN 51 562-1, 40°C	ISO VG class	100
flashing point	DIN ISO 2592	> 79	°C	240
upper operating temperature		liquid lubrication	°C	200
maximal operating temperature		dry lubrication	°C	450
colour				black
density (at 20°C)	DIN EN ISO 3838		g/cm <sup>3</sup>	1.01
four-ball test rig welding load	DIN 51 350-4		N	2,800
four-ball test rig wear	DIN 51 350-5		mm	0.6

### OKS Spezialschmierstoffe GmbH

Ganghoferstraße 47  
82216 Maisach  
Phone: +49 (0) 8142 3051 - 500  
info@oks-germany.com  
[www.oks-germany.com](http://www.oks-germany.com)



The information in this publication reflects state-of-the-art technology, as well as extensive testing and experience. Due to the diversity of possible applications and technical realities, they can only serve as recommendations and are not arbitrarily transferable. Therefore, no obligations, liability or warranty claims can be derived from them. We only accept liability for the suitability of our products for particular purposes, and for certain properties of our products, in the event that we have accepted such liability in writing in the individual case. Any case of justified warranty claims shall be limited to the delivery of replacement goods free of defects, in the event that this subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular the liability for consequential injuries or damage, shall always be excluded. Prior to use, the customer must conduct its own testing to prove suitability. The data are subject to change for the sake of progress. ® = Registered trademark  
**Safety data sheet** for industrial and commercial users is available for downloading under [www.oks-germany.com](http://www.oks-germany.com). Our Customer and Technical service will be pleased to help should you have any further questions.