



OKS 530

MoS₂ Bonded Coating, water-based, air-drying

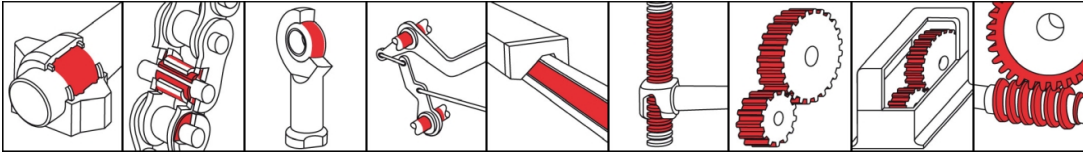

Description

OKS 530 is a MoS₂ bonded coating for lubrication of heavily loaded chains when oil and grease lubrication is no longer possible.

Applications

- Dry lubrication with solid lubricants as longer-acting reserve layers in area of low sliding speeds subject to high surface pressures and pre-determined sliding paths
- Wear protection for increased service life of sliding surfaces
- Fully effective even after longer standstills
- Resistant to high temperatures, no adhesion of dust and dirt

Advantages and benefits

- Highly effective due to good adhesion to prepared substrates
- Consistent coefficient of sliding friction under maximum loading of sliding film
- Wear protection of sliding points that can otherwise not be lubricated is possible
- Firmly adhering, pressure and temperature-resistant dry lubricating film

Branches

- Chemical industry
- Glass and foundry industry
- Shipbuilding and marine technology
- Rubber and plastic processing
- Rail vehicle technology
- Municipal services
- Plant and machine (tool) engineering
- Logistics
- Paper and packaging industry
- Iron and steel industry

Application tips

For optimum adhesion clean surfaces, first mechanically and then with OKS 2610/OKS 2611 Universal Cleaner. The surfaces must be metallic bright and dry. Chemical or mechanical preparation of the surfaces might considerably improve the service life of the bonded coating. Stir well prior to use. The application preferably is effected by spraying or dipping, in single cases also by brushing a uniform thin film on to the prepared surfaces. Local excess should be avoided. Drying and curing conditions acc. to the following technical data.

Packaging

- 1 kg Can
- 5 kg Canister
- 25 kg Canister

OKS 530

MoS₂ Bonded Coating, water-based, air-drying

Technical data

	Standard	Conditions	Unit	Value
Main components				
binder				organic binder
solvent				solvent
solvent				water
solid lubricants				graphite
solid lubricants				MoS ₂
Application related technical data				
flashing point	DIN 51 755 (-2)	< 65 (< 5°C)	°C	37
lower operating temperature			°C	-35
upper operating temperature			°C	450
surface covering			m ² /kg	< 15
processing temperature			°C	20-25
drying time		20°C	min	60-120
colour				black
density (at 20°C)	DIN EN ISO 3838		g/cm ³	1.1
thread friction coefficient (μ total)	DIN EN ISO 16 047	screw ISO 4017 M10x55-8.8 black-oxide, nut ISO 4032 M10-10 black-oxide		0.05
press-fit test (μ)	draft DIN 51 833			0.1, no chatter
Product specific technical data				
dilution				with water, max. 1:1

OKS Spezialschmierstoffe GmbH

Ganghoferstraße 47
 82216 Maisach
 ☎ +49 8142 3051 - 500
 ✉ info@oks-germany.com
 🏠 www.oks-germany.com



The information in this publication reflects state-of-the-art technology, as well as extensive testing and experience. Due to the diversity of possible applications and technical realities, they can only serve as recommendations and are not arbitrarily transferable. Therefore, no obligations, liability or warranty claims can be derived from them. We only accept liability for the suitability of our products for particular purposes, and for certain properties of our products, in the event that we have accepted such liability in writing in the individual case. Any case of justified warranty claims shall be limited to the delivery of replacement goods free of defects, in the event that this subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular the liability for consequential injuries or damage, shall always be excluded. Prior to use, the customer must conduct its own testing to prove suitability. The data are subject to change for the sake of progress. ® = Registered trademark
Product restricted to professional users. Safety data sheet available for download at www.oks-germany.com
 Our Customer and Technical service will be pleased to help should you have any further questions.