
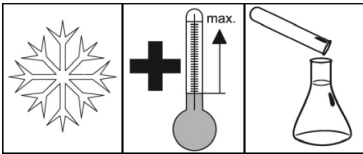


## OKS 570

### PTFE Bonded Coating

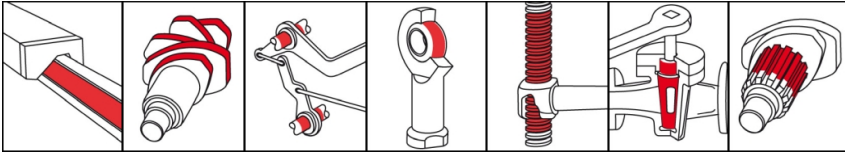

#### Description

PTFE bonded coating for dry lubrication of different material pairs at low pressures, low speeds and in dusty environments.

#### Applications

- Dry lubrication of the most varied materials sliding on top of or rubbing against each other (such as metals, wood, ceramic, rubber, and also adhesives or paintable plastics)
- Anti-stick coating of seals or sealing surfaces of all kinds to prevent sticking-on
- To cure the squeaking noises of soft on hard materials
- For water-repellent impregnation of absorbent materials
- Separating film in cast resin applications

#### Advantages and benefits

- Dry, non-soiling film
- Highly effective due to good adhesion to prepared substrates
- Colourless and odourless low-friction coating with non-stick properties
- Prevents frictional corrosion
- Dries at room temperature
- Also available as spray version OKS 571

#### Branches

- Rail vehicle technology
- Rubber and plastic processing
- Shipbuilding and marine technology
- Logistics
- Plant and machine (tool) engineering
- Municipal services
- Glass and foundry industry
- Iron and steel industry
- Paper and packaging industry
- Chemical industry

#### Application tips

For optimum adhesion, clean the surfaces. Best way is to clean mechanically first and then with OKS 2610/OKS 2611 universal cleaner. The surfaces to be treated must be bright metal and dry. Chemical or mechanical pretreatment of surfaces may extend the service life of the non-stick paint. Stir the paint thoroughly before use. Apply OKS 570 in an evenly thin film to the prepared surfaces, preferably by spraying or dipping, in individual cases also by brush. Spray OKS 571 on evenly. Avoid local excesses (e.g. 'curtaining'). Drying and curing conditions as per the following technical data.

#### Packaging

- 500 ml Can
- 5 l Hobbock
- 25 l Hobbock

# OKS 570

## PTFE Bonded Coating

### Technical data

	Standard	Conditions	Unit	Value
<b>Main components</b>				
binder				silicone resin
solvent				solvent mixture
solid lubricants				PTFE
additives				UV indicator
<b>Application related technical data</b>				
flashing point	DIN 51 755 (-2)	< 65 (< 5°C)	°C	> -18
lower operating temperature			°C	-180
upper operating temperature			°C	260
optimal layer thickness	DIN 50 981/50 984	DIN 50 982-2	µm	5-20
surface covering			m <sup>2</sup> /kg	10-20
processing temperature			°C	20-25
drying time		room temperature	min	15
colour				whitish
density (at 20°C)	DIN EN ISO 3838		g/cm <sup>3</sup>	0.83
thread friction coefficient (µ total)	DIN EN ISO 16 047	screw ISO 4017 M10x55-8.8 black-oxide, nut ISO 4032 M10-10 black-oxide		0.1
press-fit test (µ)	draft DIN 51 833			0.07, no chatter

### OKS Spezialschmierstoffe GmbH

Ganghoferstraße 47  
 82216 Maisach  
 ☎ +49 8142 3051 - 500  
 ✉ info@oks-germany.com  
 🏠 www.oks-germany.com



The information in this publication reflects state-of-the-art technology, as well as extensive testing and experience. Due to the diversity of possible applications and technical realities, they can only serve as recommendations and are not arbitrarily transferable. Therefore, no obligations, liability or warranty claims can be derived from them. We only accept liability for the suitability of our products for particular purposes, and for certain properties of our products, in the event that we have accepted such liability in writing in the individual case. Any case of justified warranty claims shall be limited to the delivery of replacement goods free of defects, in the event that this subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular the liability for consequential injuries or damage, shall always be excluded. Prior to use, the customer must conduct its own testing to prove suitability. The data are subject to change for the sake of progress. ® = Registered trademark  
**Product restricted to professional users.** Safety data sheet available for download at [www.oks-germany.com](http://www.oks-germany.com)  
 Our Customer and Technical service will be pleased to help should you have any further questions.