



## OKS 8601 BIologic Multi Oil, Spray

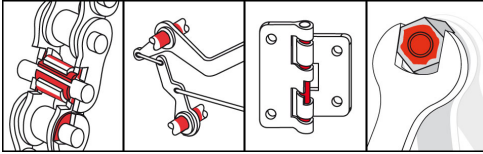

### Description

OKS 8601 is a biodegradable multi-oil with highly environmentally friendly ingredients.

### Applications

- Lubrication of chains and machine elements operated outdoors
- Multi Oil also at higher temperatures

### Branches

- Municipal services
- Glass and foundry industry
- Chemical industry
- Logistics
- Plant and machine (tool) engineering
- Rail vehicle technology
- Paper and packaging industry
- Iron and steel industry
- Shipbuilding and marine technology
- Rubber and plastic processing

### Advantages and benefits

- Good lubricating properties
- Good creep capacity
- Biodegradable
- VOC-free
- Can be used up to 160°C
- Silicone-free
- Percentage of renewable raw materials > 90%

### Application tips

For highest effectiveness, clean the point to be lubricated. Best way is to clean mechanically first and then with OKS 2610/OKS 2611 universal cleaner. Apply OKS 8600 evenly with a brush, drip oiler, by immersion or using a suitable automatic lubrication system. Spray OKS 8601 on evenly. Allow the product to soak in before operating. Check compatibility with seals and paintwork before using. Avoid excesses. Observe the plant manufacturer's instructions.

### Packaging

- 300 ml Spray



**OKS 8601**  
**BIologic Multi Oil, Spray**

**Technical Data**

	Standard	Conditions	Unit	Value
<b>Main components</b>				
base oil				ester
<b>Application related technical data</b>				
marking	analogue to DIN 51 502			CLX 32
viscosity at (40°C)	DIN 51 562-1		mm <sup>2</sup> /s	35-40
viscosity class	DIN ISO 3448	DIN 51 562-1, 40°C	ISO VG	32
flashing point	DIN ISO 2592	> 79	°C	270
lower operating temperature			°C	-5
upper operating temperature			°C	160
colour				yellowish-light brown
density (at 20°C)	DIN EN ISO 3838		g/cm <sup>3</sup>	0.92
<b>Product specific technical data</b>				
biodegradability	CEC-L-33-T-82	21 days	%	> 90
<b>Properties and approvals</b>				

**OKS Spezialschmierstoffe GmbH**

Ganghoferstraße 47  
 82216 Maisach  
 Phone: +49 (0) 8142 3051 - 500  
 info@oks-germany.com  
 www.oks-germany.com



The information in this publication reflects state-of-the-art technology, as well as extensive testing and experience. Due to the diversity of possible applications and technical realities, they can only serve as recommendations and are not arbitrarily transferable. Therefore, no obligations, liability or warranty claims can be derived from them. We only accept liability for the suitability of our products for particular purposes, and for certain properties of our products, in the event that we have accepted such liability in writing in the individual case. Any case of justified warranty claims shall be limited to the delivery of replacement goods free of defects, in the event that this subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular the liability for consequential injuries or damage, shall always be excluded. Prior to use, the customer must conduct its own testing to prove suitability. The data are subject to change for the sake of progress. ® = Registered trademark  
**Safety data sheet** for industrial and commercial users is available for downloading under [www.oks-germany.com](http://www.oks-germany.com). Our Customer and Technical service will be pleased to help should you have any further questions.